



Model: NU1010ECP

Basic size of
mm

d:	50
D:	80
B:	16

The basic rated load is
kN

trends C:	46.8
static state Co:	56
Fatigue load limit Pu:	6.7

Rated rotation speed is
r/min

Refer to the speed:	9000
limit speed:	9500
Specification standard holder:	0.27

model


Standard holder:	NU1010ECP
Other holder 1):	-

Dimensions are
mm

d:	50
d ₁ ~ :	-
D1 ~ :	70
F,E:	57.5
r _{1,2} the min:	1
r _{3,4} the min:	0.6
s ¹⁾ :	1

Shoulder gear and chamfer size
mm


d _a the min:	53.2
d _a the max:	56
d _b ,D _a the min:	60
D _a the max:	75.4

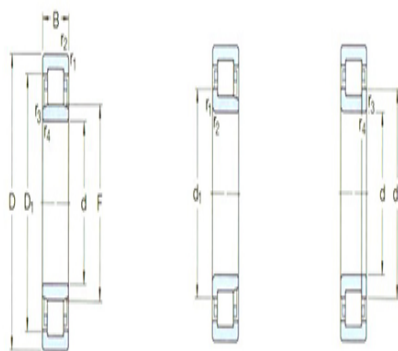


NU

N

NUP

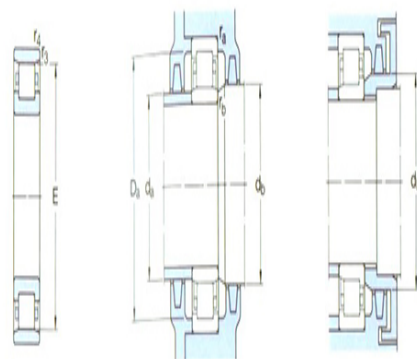

N

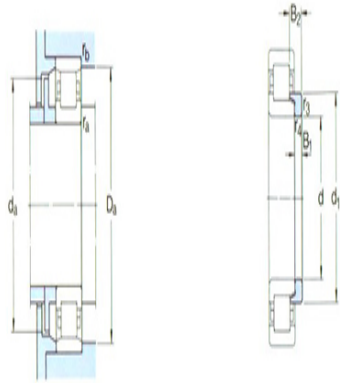

角鋼

r_a the max: 1

r_b the max: 0.6

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -