



## Model: NU210ECP

Basic size of  
mm

d:	50
D:	90
B:	20

The basic rated load is  
kN

trends C:	73.5
static state Co:	69.5
Fatigue load limit Pu:	8.8

Rated rotation speed is  
r/min

Refer to the speed:	8500
limit speed:	9000
Specification standard holder:	0.49

model


Standard holder:	*NU210ECP
Other holder 1):	J,M,ML

Dimensions are  
mm

d:	50
d <sub>1</sub> ~ :	64
D1 ~ :	78
F,E:	59.5
r <sub>1,2</sub> the min:	1.1
r <sub>3,4</sub> the min:	1.1
s <sup>1)</sup> :	1.5

Shoulder gear and chamfer size  
mm


d <sub>a</sub> the min:	57
d <sub>a</sub> the max:	57
d <sub>b</sub> ,D <sub>a</sub> the min:	62
D <sub>a</sub> the max:	83

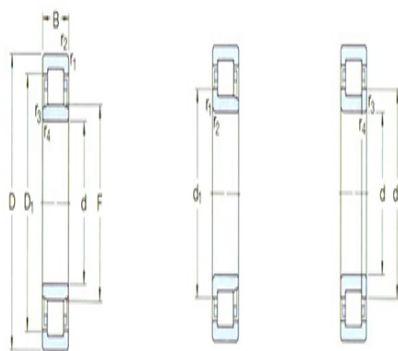


NU

N

NUP

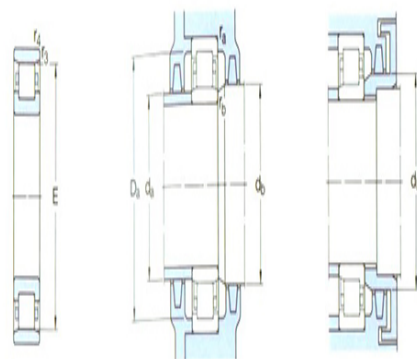

N

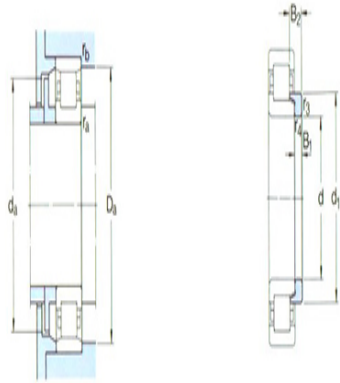

角鋼

$r_a$  the max: 1

$r_b$  the max: 1

Calculation coefficient

kr: 0.15

Corner circle

model: HJ210EC

quality: 0.058

Size B1: 5

Size B2: 9