



## Model: NUP210ECP

Basic size of  
mm

d:	50
D:	90
B:	20

The basic rated load is  
kN

trends C:	73.5
static state Co:	69.5
Fatigue load limit Pu:	8.8

Rated rotation speed is  
r/min

Refer to the speed:	8500
limit speed:	9000
Specification standard holder:	0.51

model


Standard holder:	*NUP210ECP
Other holder 1):	J,ML

Dimensions are  
mm

d:	50
d <sub>1</sub> ~ :	64
D1 ~ :	78
F,E:	59.5
r <sub>1,2</sub> the min:	1.1
r <sub>3,4</sub> the min:	1.1
s <sup>1)</sup> :	-

Shoulder gear and chamfer size  
mm


d <sub>a</sub> the min:	57
d <sub>a</sub> the max:	-
d <sub>b</sub> ,Da the min:	66
Da the max:	83

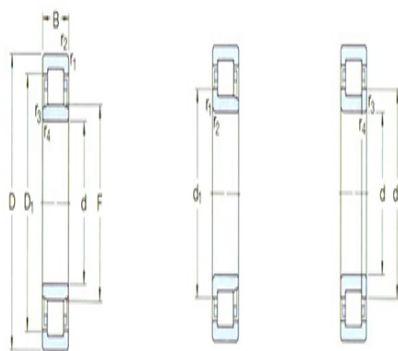

NU

N

NUP

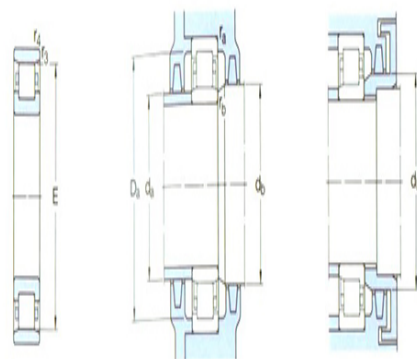

N

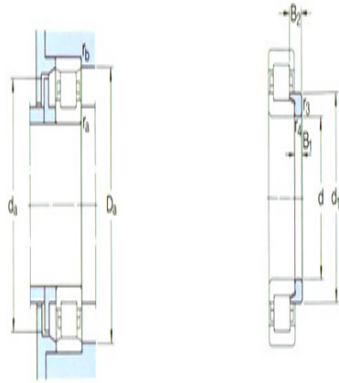


图 8

$r_a$ the max:	1
$r_b$ the max:	1

Calculation coefficient

kr:	0.15
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-