


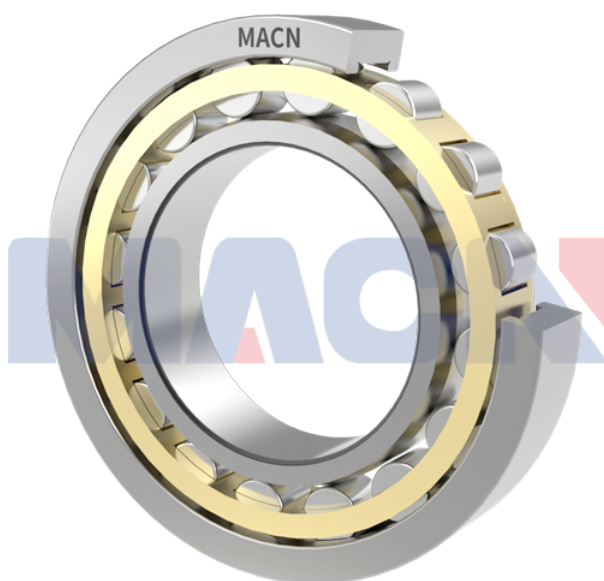

Model: NU2210ECP

Basic size of
mm

d:	50
D:	90
B:	23

The basic rated load is
kN

trends C:	90
static state Co:	88
Fatigue load limit Pu:	11.4

Rated rotation speed is
r/min

Refer to the speed:	8500
limit speed:	9000
Specification standard holder:	0.56

model


Standard holder:	*NU2210EC P
Other holder 1):	J,M,ML

Dimensions are
mm

d:	50
d ₁ ~ :	-
D1 ~ :	78
F,E:	59.5
r _{1,2} the min:	1.1
r _{3,4} the min:	1.1
s ¹⁾ :	1.5

Shoulder gear and chamfer size
mm


d _a the min:	57
d _a the max:	57
d _b ,Da the min:	62
Da the max:	83

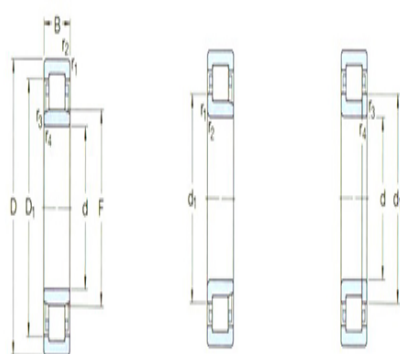

NU

NU

NUP

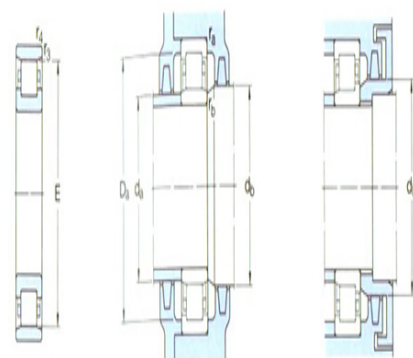

N

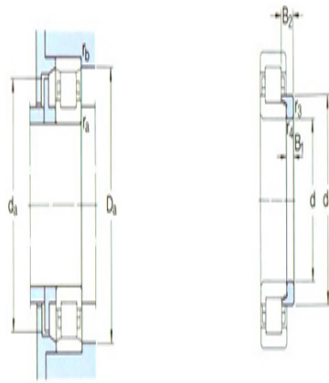


Figure 1

r_a the max:	1
r_b the max:	1

Calculation coefficient

kr:	0.2
-----	-----

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-