



## Model: NUP2211ECP

Basic size of  
 mm

d:	55
D:	100
B:	25

The basic rated load is  
 kN

trends C:	114
static state Co:	118
Fatigue load limit Pu:	15.3

Rated rotation speed is  
 r/min

Refer to the speed:	7500
limit speed:	8000
Specification standard holder:	0.82

model



Standard holder:	*NUP2211EC P
Other holder 1):	J,ML

Dimensions are  
 mm


d:	55
d <sub>1</sub> ~ :	70.8
D1 ~ :	86.3
F,E:	66
r <sub>1,2</sub> the min:	1.5
r <sub>3,4</sub> the min:	1.1
s <sup>1)</sup> :	-

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	64
d <sub>a</sub> the max:	-
d <sub>b</sub> ,D <sub>a</sub> the min:	73
D <sub>a</sub> the max:	91

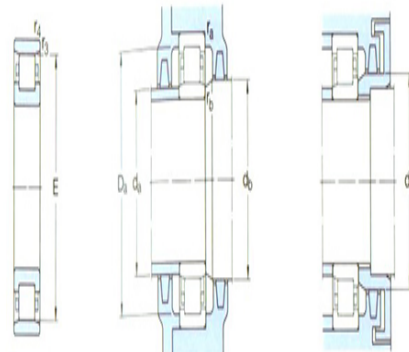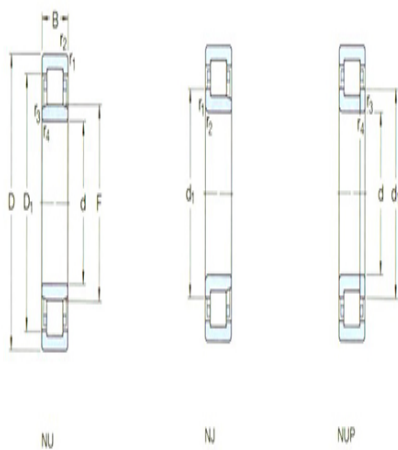

N

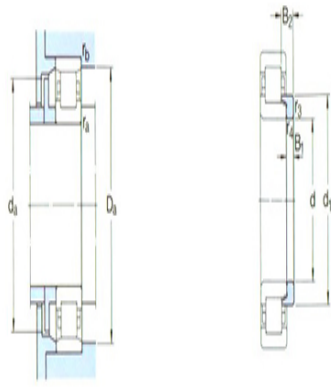

Figure

$r_a$  the max: 1.5

$r_b$  the max: 1

Calculation coefficient

kr: 0.2

Corner circle

model: -

quality: -

Size B1: -

Size B2: -