

Model: NU1012ML

Basic size of
mm

d:	60
D:	95
B:	18

The basic rated load is
kN

trends C:	37.4
static state Co:	44
Fatigue load limit Pu:	5.3

Rated rotation speed is
r/min

Refer to the speed:	8000
limit speed:	11000
Specification standard holder:	0.48

model



Standard holder:	NU1012ML
Other holder 1):	-

Dimensions are
mm


d:	60
$d_1 \sim$:	-
D1 ~:	81.6
F,E:	69.5
$r_{1,2}$ the min:	1.1
$r_{3,4}$ the min:	1
s^1):	2.9

Shoulder gear and chamfer size
mm

d_a the min:	64.6
d_a the max:	68
d_b, D_a the min:	72
D_a the max:	89

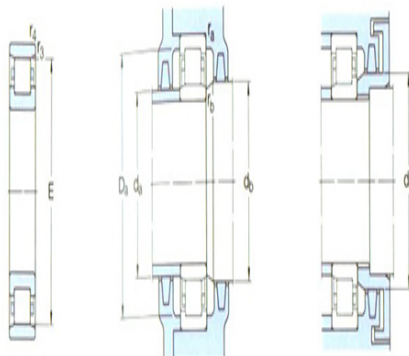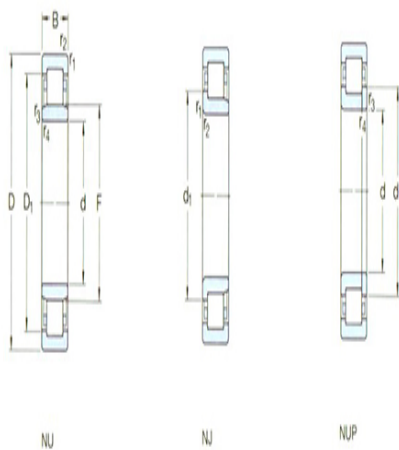

N

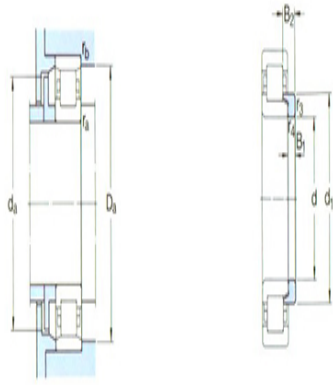

图例

r_a the max: 1

r_b the max: 1

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -