



Model: NU2312ECP

Basic size of
mm

d:	60
D:	130
B:	46

The basic rated load is
kN

trends C:	260
static state Co:	265
Fatigue load limit Pu:	34.5

Rated rotation speed is
r/min

Refer to the speed:	5600
limit speed:	6700
Specification standard holder:	2.75

model


Standard holder:	*NU2312EC P
Other holder 1):	ML

Dimensions are
mm

d:	60
d ₁ ~ :	-
D1 ~ :	110
F,E:	77
r _{1,2} the min:	2.1
r _{3,4} the min:	2.1
s ¹⁾ :	3.6

Shoulder gear and chamfer size
mm


d _a the min:	72
d _a the max:	74
d _b ,D _a the min:	79
D _a the max:	118

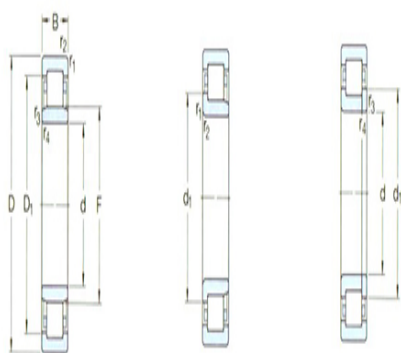

NU

NU

NUP

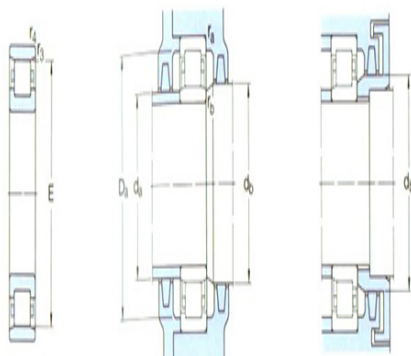

N



9/10

r_a the max:	2
r_b the max:	2

Calculation coefficient

kr:	0.25
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-