

Model: NU2313ECP

Basic size of
mm

d:	65
D:	140
B:	48

The basic rated load is
kN

trends C:	285
static state Co:	290
Fatigue load limit Pu:	38

Rated rotation speed is
r/min


Refer to the speed:	5300
limit speed:	6000
Specification standard holder:	3.3

model


Standard holder:	*NU2313EC
	P
Other holder 1):	ML

Dimensions are
mm

d:	65
$d_1 \sim :$	-
$D_1 \sim :$	119
F,E:	82.5
$r_{1,2}$ the min:	2.1
$r_{3,4}$ the min:	2.1
$s^1):$	4.7

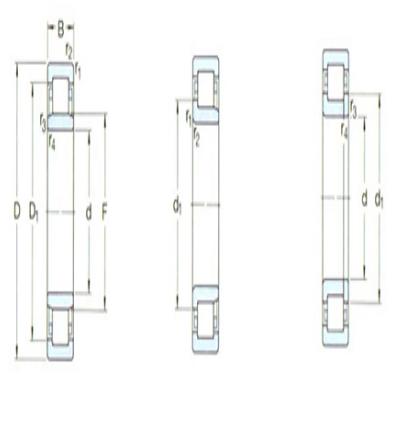

NU NU NUP

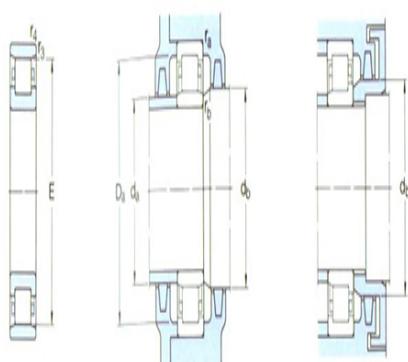

N

Shoulder gear and chamfer size
mm

d_a the min:	77
d_a the max:	80
d_b, Da the min:	85
Da the max:	128



r_a the max: 2

r_b the max: 2

Calculation coefficient

kr: 0.25

Corner circle

model: -

quality: -

Size B1: -

Size B2: -