



**Model: NUP2313ECP**

Basic size of  
 mm

d:	65
D:	140
B:	48

The basic rated load is  
 kN

trends C:	285
static state Co:	290
Fatigue load limit Pu:	38

Rated rotation speed is  
 r/min

Refer to the speed:	5300
limit speed:	6000
Specification standard holder:	3.45

model



Standard holder:	*NUP2313ECP
Other holder 1):	ML

Dimensions are  
 mm

d:	65
d <sub>1</sub> ~ :	90.5
D1 ~ :	119
F,E:	82.5
r <sub>1,2</sub> the min:	2.1
r <sub>3,4</sub> the min:	2.1
s <sup>1)</sup> :	-

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	77
d <sub>a</sub> the max:	-
d <sub>b</sub> ,Da the min:	93
Da the max:	128

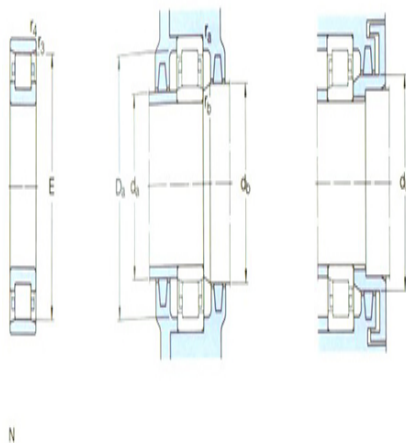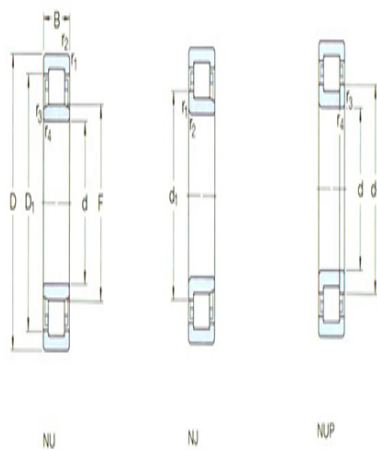

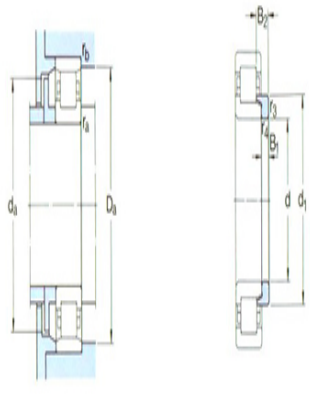


Figure 1

$r_a$ the max:	2
$r_b$ the max:	2

Calculation coefficient

kr:	0.25
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-