

Model: NU413

Basic size of
mm

| | |
|----|-----|
| d: | 65 |
| D: | 160 |
| B: | 37 |

The basic rated load is
kN

| | |
|------------------------|-----|
| trends C: | 183 |
| static state Co: | 190 |
| Fatigue load limit Pu: | 24 |

Rated rotation speed is
r/min

| | |
|--------------------------------|------|
| Refer to the speed: | 4800 |
| limit speed: | 5600 |
| Specification standard holder: | 3.6 |

model



| | |
|------------------|-----------|
| Standard holder: | NU41 3 |
| Other holder 1): | - |

Dimensions are
mm

| | |
|--------------------|------|
| d: | 65 |
| $d_1 \sim$: | 98.5 |
| $D_1 \sim$: | 125 |
| F,E: | 89.3 |
| $r_{1,2}$ the min: | 2.1 |
| $r_{3,4}$ the min: | 2.1 |
| s^1): | 2.6 |

Shoulder gear and chamfer size
mm

| | |
|---------------------|-----|
| d_a the min: | 79 |
| d_a the max: | 86 |
| d_b, D_a the min: | 92 |
| D_a the max: | 146 |

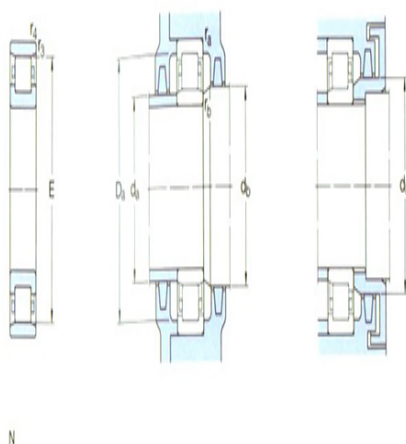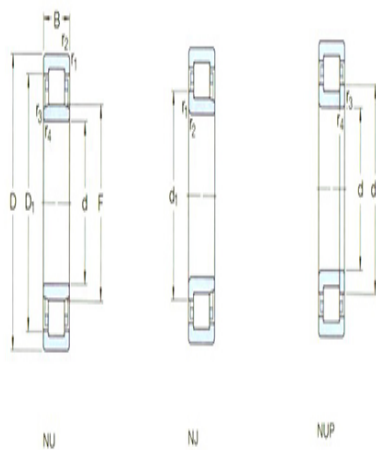

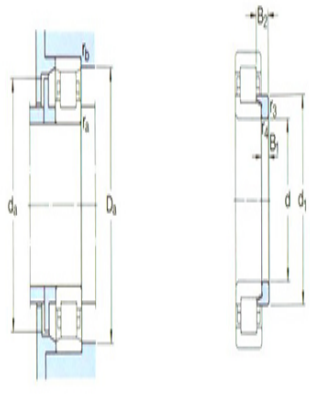


Figure 1

| | |
|----------------|---|
| r_a the max: | 2 |
| r_b the max: | 2 |

Calculation coefficient

| | |
|-----|------|
| kr: | 0.15 |
|-----|------|

Corner circle

| | |
|----------|-------|
| model: | HJ413 |
| quality: | 0.42 |
| Size B1: | 11 |
| Size B2: | 18 |