



### Model: NJ413

Basic size of  
mm

d:	65
D:	160
B:	37

The basic rated load is  
kN

trends C:	183
static state Co:	190
Fatigue load limit Pu:	24

Rated rotation speed is  
r/min

Refer to the speed:	4800
limit speed:	5600
Specification standard holder:	3.65

model



Standard holder:	NJ413
	3
Other holder 1):	-


Dimensions are  
mm

d:	65
$d_1 \sim$ :	98.5
$D_1 \sim$ :	125
F,E:	89.3
$r_{1,2}$ the min:	2.1
$r_{3,4}$ the min:	2.1
$s^1$ ):	2.6

Shoulder gear and chamfer size  
mm

$d_a$ the min:	79
$d_a$ the max:	86
$d_b, D_a$ the min:	92
$D_a$ the max:	146

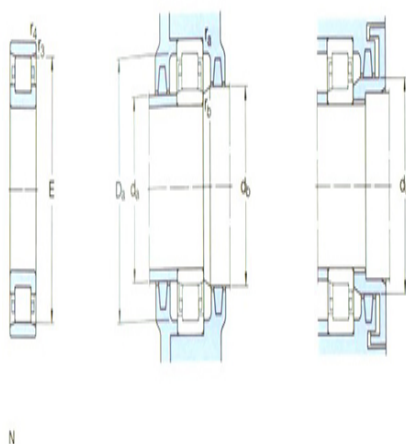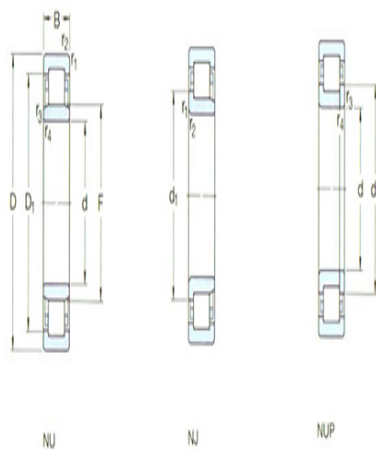

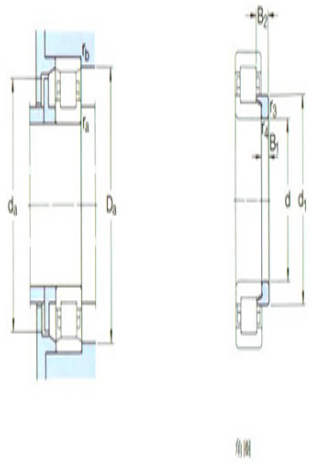

$r_a$ the max:	2
$r_b$ the max:	2

Calculation coefficient

kr:	0.15
-----	------

Corner circle

model:	HJ41 3
quality:	0.42
Size B1:	11
Size B2:	18