



Model: NU1014ECP

Basic size of
 mm

d:	70
D:	110
B:	20

The basic rated load is
 kN

trends C:	76.5
static state Co:	93
Fatigue load limit Pu:	12

Rated rotation speed is
 r/min

Refer to the speed:	6300
limit speed:	7000
Specification standard holder:	0.62

model



Standard holder:	NU1014ECP
Other holder 1):	-

Dimensions are
 mm

d:	70
d ₁ ~ :	84
D1 ~ :	97.5
F,E:	79.5
r _{1,2} the min:	1.1
r _{3,4} the min:	1
s ¹⁾ :	1.3

Shoulder gear and chamfer size
 mm

d _a the min:	74.6
d _a the max:	78
d _b ,D _a the min:	82
D _a the max:	104

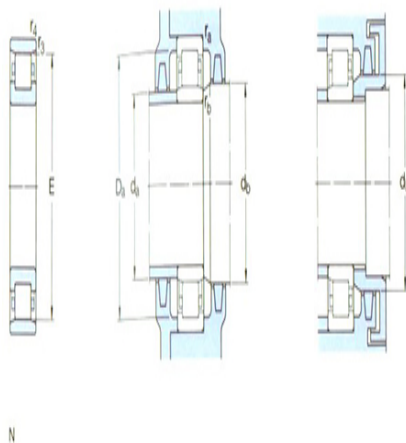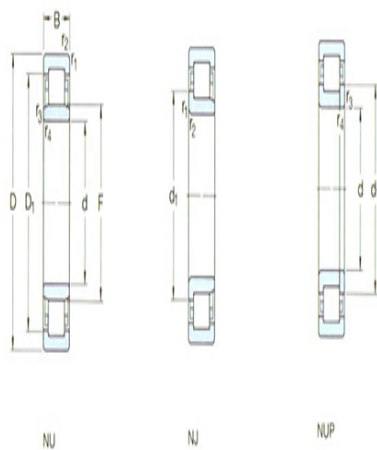

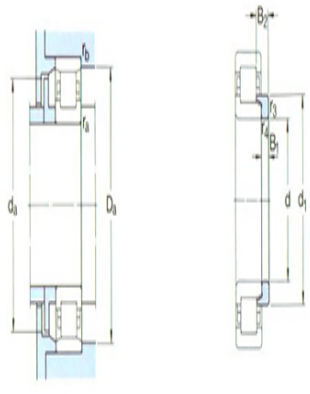


Figure 1

r_a the max:	1
r_b the max:	1

Calculation coefficient

kr:	0.1
-----	-----

Corner circle

model:	HJ1014EC
quality:	0.082
Size B1:	5
Size B2:	10