



## Model: NUP314ECP

Basic size of  
mm

d:	70
D:	150
B:	35

The basic rated load is  
kN

trends C:	236
static state Co:	228
Fatigue load limit Pu:	29

Rated rotation speed is  
r/min

Refer to the speed:	4800
limit speed:	5600
Specification standard holder:	2.85

model



Standard holder:	*NUP314ECP
Other holder 1):	M,ML


Dimensions are  
mm

d:	70
$d_1 \sim$ :	97.3
$D1 \sim$ :	127
F,E:	89
$r_{1,2}$ the min:	2.1
$r_{3,4}$ the min:	2.1
$s^1$ ):	-

Shoulder gear and chamfer size  
mm

$d_a$ the min:	82
$d_a$ the max:	-
$d_b, Da$ the min:	100
$Da$ the max:	138

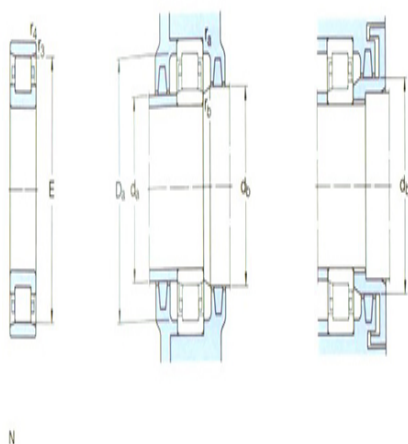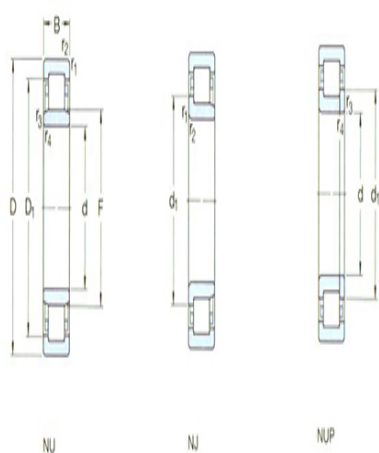

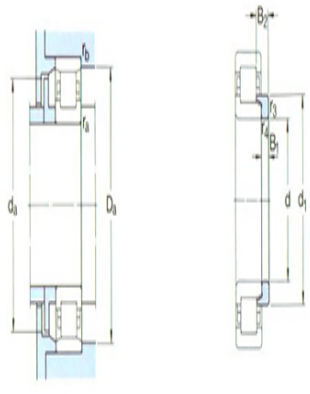

图例

$r_a$ the max:	2
$r_b$ the max:	2

Calculation coefficient

kr:	0.15
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-