



Model: NU2314ECP

Basic size of
 mm

d:	70
D:	150
B:	51

The basic rated load is
 kN

trends C:	315
static state Co:	325
Fatigue load limit Pu:	41.5

Rated rotation speed is
 r/min

Refer to the speed:	4800
limit speed:	5600
Specification standard holder:	4

model



Standard holder:	*NU2314ECP
Other holder 1):	ML

Dimensions are
 mm

d:	70
d ₁ ~ :	97.3
D1 ~ :	127
F,E:	89
r _{1,2} the min:	2.1
r _{3,4} the min:	2.1
s ¹⁾ :	4.8

Shoulder gear and chamfer size
 mm

d _a the min:	82
d _a the max:	86
d _b ,D _a the min:	91
D _a the max:	138

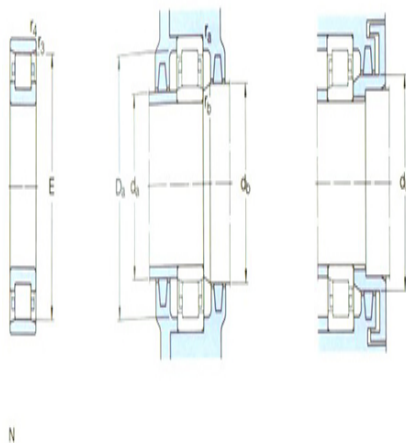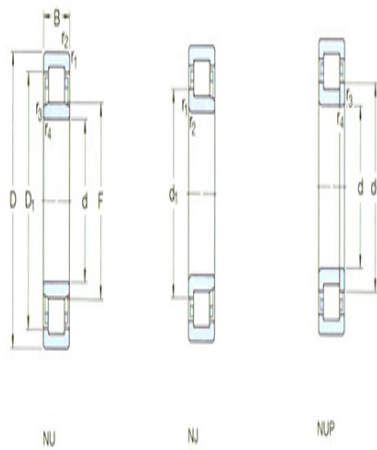

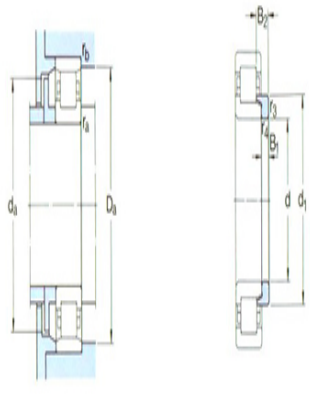


Figure 1

r_a the max:	2
r_b the max:	2

Calculation coefficient

kr:	0.25
-----	------

Corner circle

model:	HJ2314EC
quality:	0.34
Size B1:	10
Size B2:	18.5