



Model: NU1016

Basic size of
mm

d:	80
D:	125
B:	22

The basic rated load is
kN

trends C:	66
static state Co:	81.5
Fatigue load limit Pu:	10.4

Rated rotation speed is
r/min

Refer to the speed:	6300
limit speed:	6300
Specification standard holder:	1

model



Standard holder:	NU1016
Other holder 1):	-

Dimensions are
mm

d:	80
d ₁ ~ :	-
D1 ~ :	109
F,E:	91.5
r _{1,2} the min:	1.1
r _{3,4} the min:	1
s ¹⁾ :	3.3

Shoulder gear and chamfer size
mm

d _a the min:	86
d _a the max:	90
d _b ,D _a the min:	94
D _a the max:	119

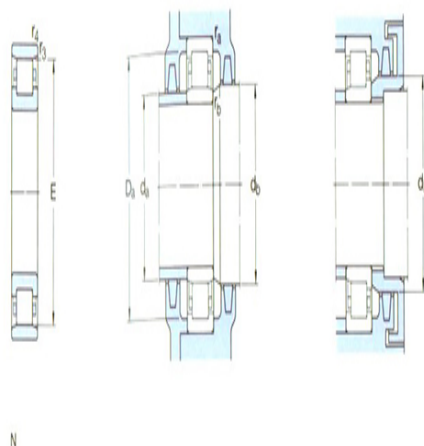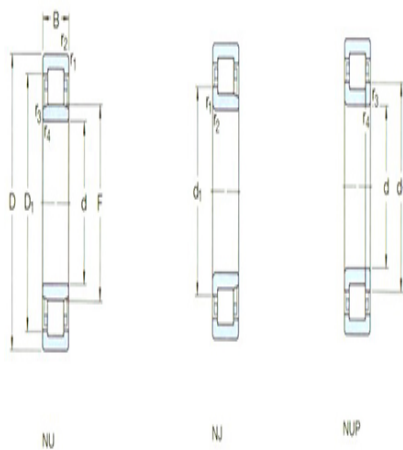



11

r_a the max: 1

r_b the max: 1

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -