



Model: NU2316ECP

Basic size of
 mm

d:	80
D:	170
B:	58

The basic rated load is
 kN

trends C:	415
static state Co:	440
Fatigue load limit Pu:	55

Rated rotation speed is
 r/min

Refer to the speed:	4300
limit speed:	5000
Specification standard holder:	5.95

model



Standard holder:	*NU2316ECP
Other holder 1):	M,ML

Dimensions are
 mm

d:	80
d ₁ ~ :	110
D1 ~ :	144
F,E:	101
r _{1,2} the min:	2.1
r _{3,4} the min:	2.1
s ¹⁾ :	5.1

Shoulder gear and chamfer size
 mm

d _a the min:	92
d _a the max:	98
d _b ,D _a the min:	104
D _a the max:	158

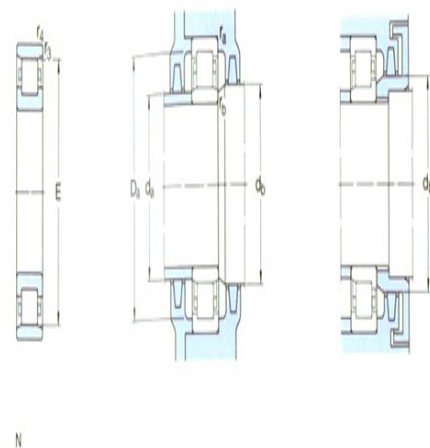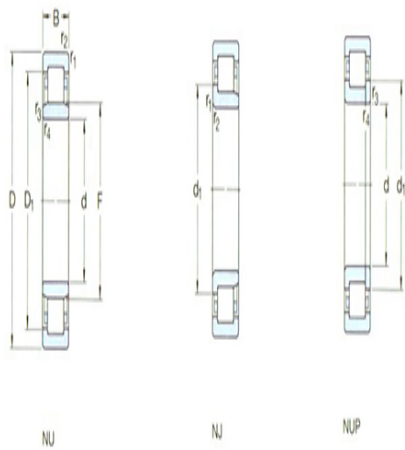



9/11

r_a the max:	2
r_b the max:	2

Calculation coefficient

kr:	0.25
-----	------

Corner circle

model:	HJ2316EC
quality:	0.48
Size B1:	11
Size B2:	20