

Model: NU1017ML

Basic size of
mm

d:	85
D:	130
B:	22

The basic rated load is
kN

trends C:	68.2
static state Co:	86.5
Fatigue load limit Pu:	10.8

Rated rotation speed is
r/min

Refer to the speed:	6000
limit speed:	9000
Specification standard holder:	1.05

model


Standard holder:	NU1017M L
Other holder 1):	-

Dimensions are
mm

d:	85
d ₁ ~ :	-
D1 ~ :	114
F,E:	96.5
r _{1,2} the min:	1.1
r _{3,4} the min:	1
s ¹⁾ :	3.3

Shoulder gear and chamfer size
mm


d _a the min:	89.6
d _a the max:	95
d _b ,Da the min:	99
Da the max:	124

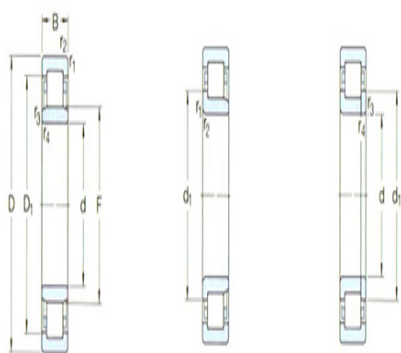


NU

NU

NUP

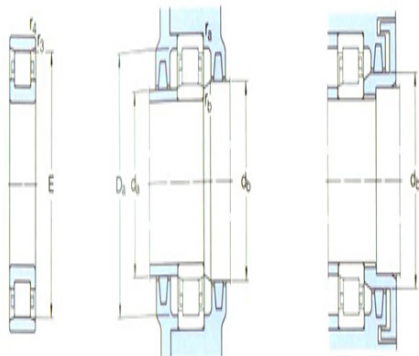

N

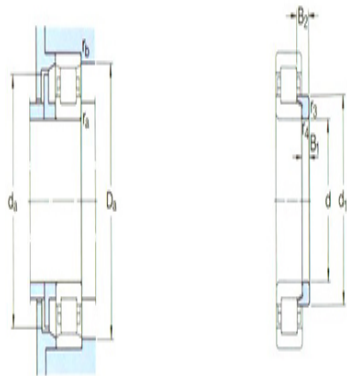

r_a the max: 1

r_b the max: 1

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -