



**Model: NJ2318ECP**

Basic size of  
 mm

|    |     |
|----|-----|
| d: | 90  |
| D: | 190 |
| B: | 64  |

The basic rated load is  
 kN

|                        |      |
|------------------------|------|
| trends C:              | 500  |
| static state Co:       | 540  |
| Fatigue load limit Pu: | 65.5 |

Rated rotation speed is  
 r/min

|                                |      |
|--------------------------------|------|
| Refer to the speed:            | 3800 |
| limit speed:                   | 4500 |
| Specification standard holder: | 8.15 |

model



|                  |            |
|------------------|------------|
| Standard holder: | *NJ2318ECP |
| Other holder 1): | J,ML,M     |

Dimensions are  
 mm


|                           |       |
|---------------------------|-------|
| d:                        | 90    |
| d <sub>1</sub> ~ :        | 124   |
| D1 ~ :                    | 162   |
| F,E:                      | 113.5 |
| r <sub>1,2</sub> the min: | 3     |
| r <sub>3,4</sub> the min: | 3     |
| s <sup>1)</sup> :         | 6     |

Shoulder gear and chamfer size  
 mm

|   |     |
|---|-----|
| d <sub>a</sub> the min:                 | 104 |
| d <sub>a</sub> the max:                 | 110 |
| d <sub>b</sub> ,D <sub>a</sub> the min: | 127 |
| D <sub>a</sub> the max:                 | 176 |

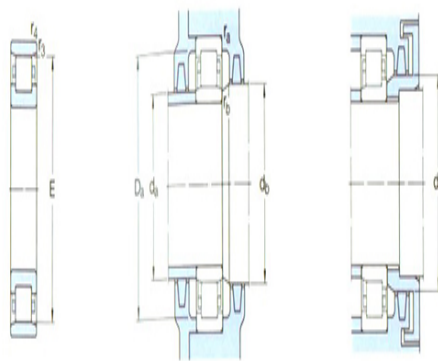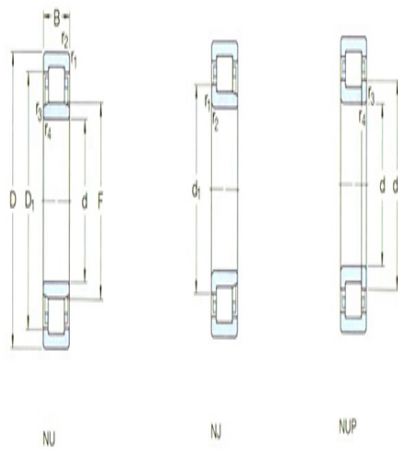

N

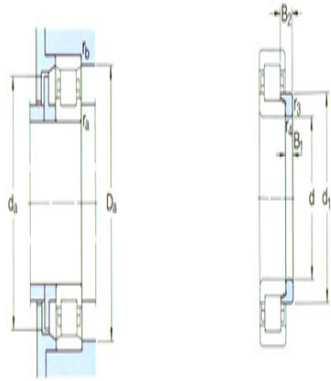

角鋼

$r_a$  the max: 2.5

$r_b$  the max: 2.5

Calculation coefficient

kr: 0.25

Corner circle

model: -

quality: -

Size B1: -

Size B2: -