



Model: NU418

Basic size of
 mm

| | |
|----|-----|
| d: | 90 |
| D: | 225 |
| B: | 54 |

The basic rated load is
 kN

| | |
|------------------------|-----|
| trends C: | 380 |
| static state Co: | 415 |
| Fatigue load limit Pu: | 48 |

Rated rotation speed is
 r/min

| | |
|--------------------------------|------|
| Refer to the speed: | 3400 |
| limit speed: | 4000 |
| Specification standard holder: | 11.5 |

model


| | |
|------------------|-------|
| Standard holder: | NU418 |
| | 8 |
| Other holder 1): | - |

Dimensions are
 mm

| | |
|---------------------------|-------|
| d: | 90 |
| d ₁ ~ : | - |
| D1 ~ : | 176 |
| F,E: | 123.5 |
| r _{1,2} the min: | 4 |
| r _{3,4} the min: | 4 |
| s ¹⁾ : | 4.9 |

Shoulder gear and chamfer size
 mm


| | |
|-----------------------------|-----|
| d _a the min: | 106 |
| d _a the max: | 120 |
| d _b ,Da the min: | 126 |
| Da the max: | 209 |

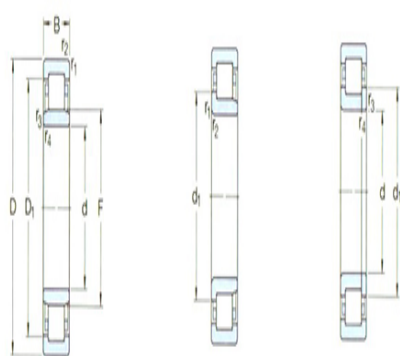


NU

NU

NUP

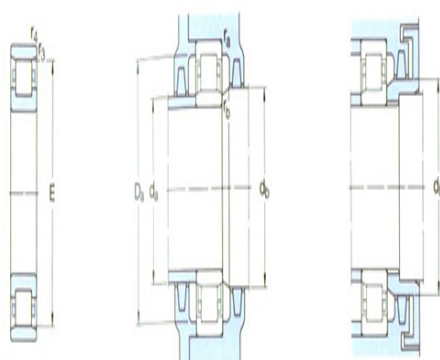

N

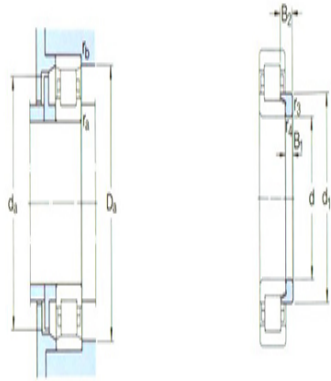

角鋼

r_a the max: 3

r_b the max: 3

Calculation coefficient

kr: 0.15

Corner circle

model: -

quality: -

Size B1: -

Size B2: -