



## Model: NU1019ML

Basic size of  
mm

d:	95
D:	145
B:	24

The basic rated load is  
kN

trends C:	84.2
static state Co:	110
Fatigue load limit Pu:	13.2

Rated rotation speed is  
r/min

Refer to the speed:	5300
limit speed:	8000
Specification standard holder:	1.4

model



Standard holder:	NU1019M L
Other holder 1):	-


Dimensions are  
mm

d:	95
$d_1 \sim$ :	-
$D_1 \sim$ :	127
F,E:	108
$r_{1,2}$ the min:	1.5
$r_{3,4}$ the min:	1.1
$s^1$ ):	3.5

Shoulder gear and chamfer size  
mm

$d_a$ the min:	101
$d_a$ the max:	106
$d_b, D_a$ the min:	111
$D_a$ the max:	138

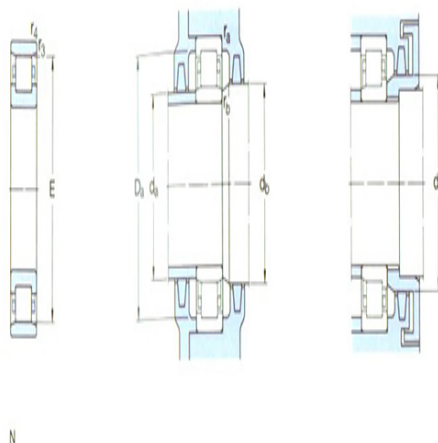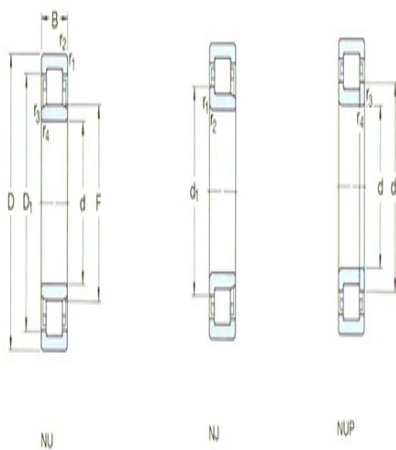

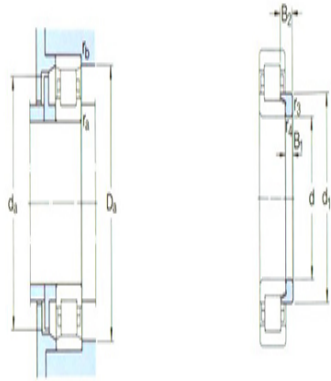

角鋼

$r_a$  the max: 1.5

$r_b$  the max: 1

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -