



## Model: NJ2219ECP

Basic size of  
mm

|    |     |
|----|-----|
| d: | 95  |
| D: | 170 |
| B: | 43  |

The basic rated load is  
kN

|                        |      |
|------------------------|------|
| trends C:              | 325  |
| static state Co:       | 375  |
| Fatigue load limit Pu: | 45.5 |

Rated rotation speed is  
r/min

|                     |      |
|---------------------|------|
| Refer to the speed: | 4300 |
| limit speed:        | 4800 |

|                                |      |
|--------------------------------|------|
| Specification standard holder: | 3.95 |
|--------------------------------|------|

model



|                  |            |
|------------------|------------|
| Standard holder: | *NJ2219ECP |
| Other holder 1): | J,M        |


Dimensions are  
mm

|                           |       |
|---------------------------|-------|
| d:                        | 95    |
| d <sub>1</sub> ~ :        | 120   |
| D1 ~ :                    | 149   |
| F,E:                      | 112.5 |
| r <sub>1,2</sub> the min: | 2.1   |
| r <sub>3,4</sub> the min: | 2.1   |
| s <sup>1)</sup> :         | 3     |

Shoulder gear and chamfer size  
mm

|   |     |
|---|-----|
| d <sub>a</sub> the min:                 | 107 |
| d <sub>a</sub> the max:                 | 110 |
| d <sub>b</sub> ,D <sub>a</sub> the min: | 123 |
| D <sub>a</sub> the max:                 | 158 |

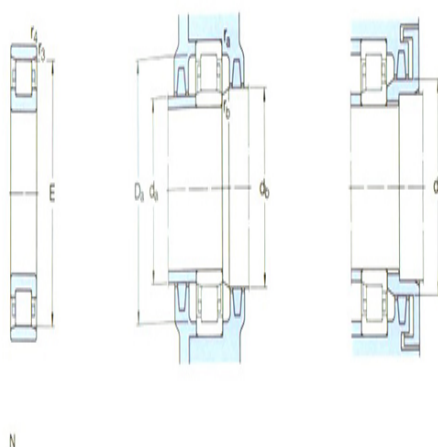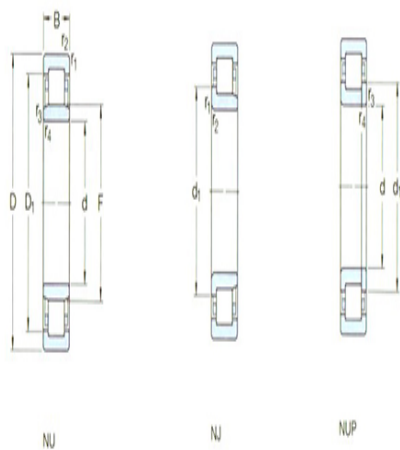

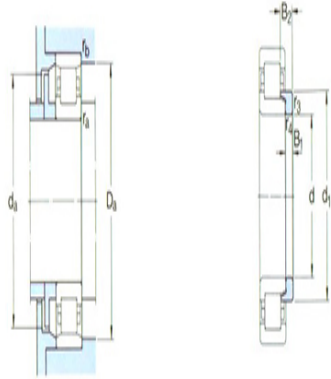

角鋼

$r_a$  the max: 2

$r_b$  the max: 2

Calculation coefficient

kr: 0.2

Corner circle

model: -

quality: -

Size B1: -

Size B2: -