


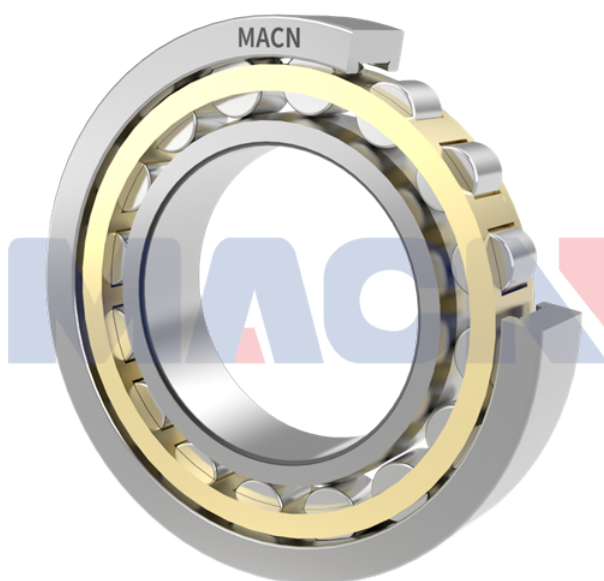

Model: NU2220ECP

Basic size of
mm

d:	100
D:	180
B:	46

The basic rated load is
kN

trends C:	380
static state Co:	450
Fatigue load limit Pu:	54

Rated rotation speed is
r/min

Refer to the speed:	4000
limit speed:	4500
Specification standard holder:	4.75

model


Standard holder:	*NU2220EC P
Other holder 1):	J,ML

Dimensions are
mm

d:	100
d ₁ ~ :	127
D1 ~ :	157
F,E:	119
r _{1,2} the min:	2.1
r _{3,4} the min:	2.1
s ¹⁾ :	2.5

Shoulder gear and chamfer size
mm


d _a the min:	112
d _a the max:	116
d _b ,Da the min:	122
Da the max:	168

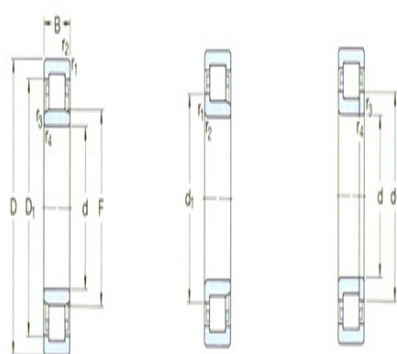


NU

NU

NUP

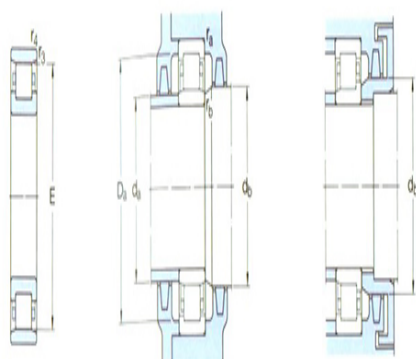

N

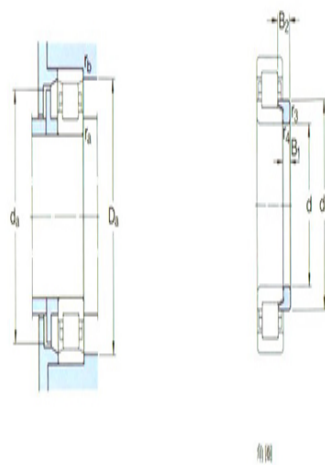

r_a the max:	2
r_b the max:	2

Calculation coefficient	
kr:	0.2

Corner circle	
model:	HJ2220EC
quality:	0.43
Size B1:	10
Size B2:	16