



Model: NJ2220ECP

Basic size of  
mm

d:	100
D:	180
B:	46

The basic rated load is  
kN

trends C:	380
static state Co:	450
Fatigue load limit Pu:	54

Rated rotation speed is  
r/min

Refer to the speed:	4000
limit speed:	4500
Specification standard holder:	4.8

model



Standard holder:	*NJ2220EC P
Other holder 1):	J,ML

Dimensions are  
mm


d:	100
$d_1 \sim :$	127
$D_1 \sim :$	157
F,E:	119
$r_{1,2}$ the min:	2.1
$r_{3,4}$ the min:	2.1
$s^1):$	2.5

Shoulder gear and chamfer size  
mm

$d_a$ the min:	112
$d_a$ the max:	116
$d_b,D_a$ the min:	130
$D_a$ the max:	168

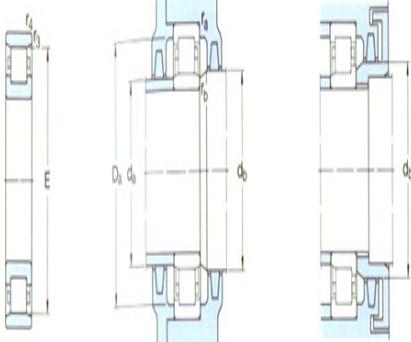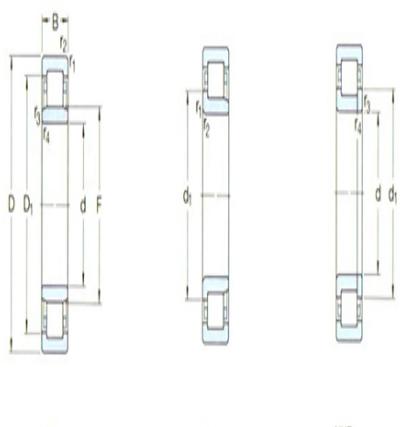

N



$r_a$  the max: 2

$r_b$  the max: 2

Calculation coefficient

kr: 0.2

Corner circle

model: HJ2220EC

quality: 0.43

Size B1: 10

Size B2: 16