



Model: NJ322ECP

Basic size of
 mm

| | |
|----|-----|
| d: | 110 |
| D: | 240 |
| B: | 50 |

The basic rated load is
 kN

| | |
|------------------------|-----|
| trends C: | 530 |
| static state Co: | 540 |
| Fatigue load limit Pu: | 61 |

Rated rotation speed is
 r/min

| | |
|--------------------------------|------|
| Refer to the speed: | 3000 |
| limit speed: | 3400 |
| Specification standard holder: | 11.1 |

model



| | |
|------------------|-----------|
| Standard holder: | *NJ322ECP |
| Other holder 1): | J,M,ML |

Dimensions are
 mm


| | |
|---------------------------|-----|
| d: | 110 |
| d ₁ ~ : | 155 |
| D1 ~ : | 201 |
| F,E: | 143 |
| r _{1,2} the min: | 3 |
| r _{3,4} the min: | 3 |
| s ¹⁾ : | 3 |

Shoulder gear and chamfer size
 mm

| | |
|---|-----|
| d _a the min: | 124 |
| d _a the max: | 139 |
| d _b ,D _a the min: | 159 |
| D _a the max: | 226 |

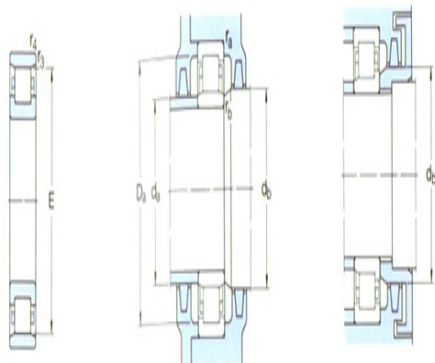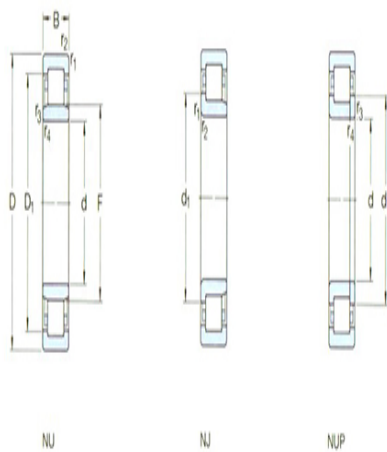

N

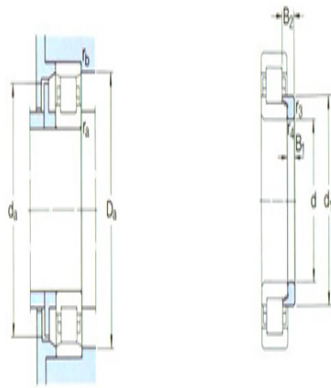

角鋼

r_a the max: 2.5

r_b the max: 2.5

Calculation coefficient

kr: 0.15

Corner circle

model: HJ322EC

quality: 1.2

Size B1: 14

Size B2: 22