



**Model: NUP322ECP**

Basic size of  
 mm

d:	110
D:	240
B:	50

The basic rated load is  
 kN

trends C:	530
static state Co:	540
Fatigue load limit Pu:	61

Rated rotation speed is  
 r/min

Refer to the speed:	3000
limit speed:	3400
Specification standard holder:	11.2

model



Standard holder:	*NUP322ECP
Other holder 1):	J,ML

Dimensions are  
 mm


d:	110
d <sub>1</sub> ~ :	155
D1 ~ :	201
F,E:	143
r <sub>1,2</sub> the min:	3
r <sub>3,4</sub> the min:	3
s <sup>1)</sup> :	-

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	124
d <sub>a</sub> the max:	-
d <sub>b</sub> ,Da the min:	159
Da the max:	226

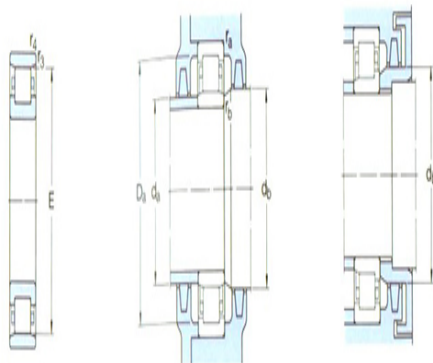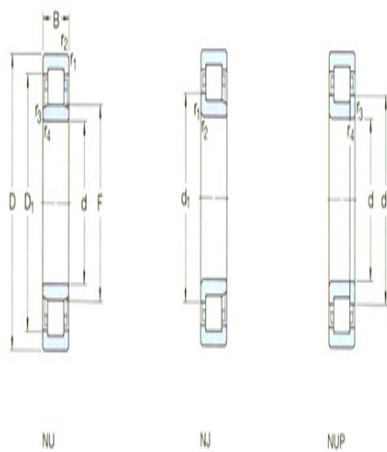

N

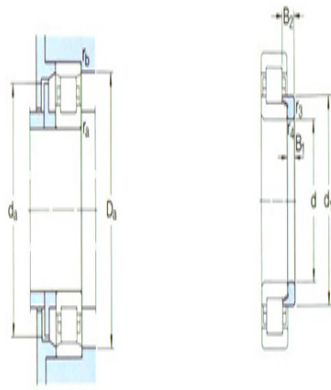

角鋼

$r_a$  the max: 2.5

$r_b$  the max: 2.5

Calculation coefficient

kr: 0.15

Corner circle

model: -

quality: -

Size B1: -

Size B2: -