

Model: NU1028ML

Basic size of
 mm

| | |
|----|-----|
| d: | 140 |
| D: | 210 |
| B: | 33 |

The basic rated load is
 kN

| | |
|---------------------------|-----|
| trends C: | 172 |
| static state Co: | 245 |
| Fatigue load limit Pu: | 27 |

Rated rotation speed is
 r/min

| | |
|-----------------------------------|------|
| Refer to the speed: | 3600 |
| limit speed: | 5300 |
| Specification standard holder: | 4.05 |

model


| | |
|------------------|--------------|
| Standard holder: | NU1028M L |
| Other holder 1): | M |

Dimensions are
 mm

| | |
|---------------------------|-----|
| d: | 140 |
| d ₁ ~ : | - |
| D1 ~ : | 185 |
| F,E: | 158 |
| r _{1,2} the min: | 2 |
| r _{3,4} the min: | 1.1 |
| s ¹⁾ : | 4.4 |

Shoulder gear and chamfer size
 mm


| | |
|---|-----|
| d _a the min: | 146 |
| d _a the max: | 155 |
| d _b ,D _a the min: | 161 |
| D _a the max: | 201 |

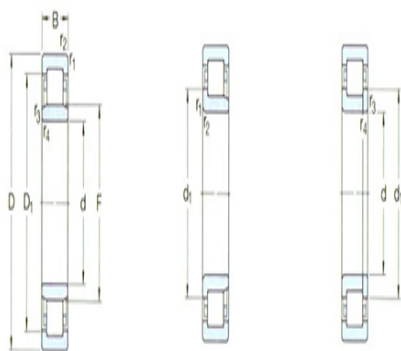

NU

NU

NJP

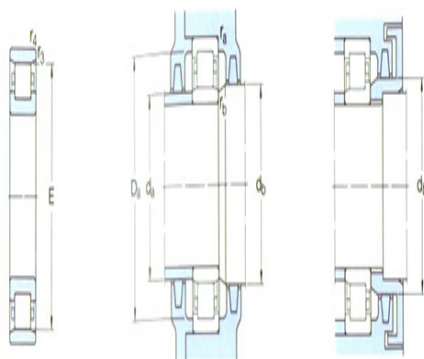

N



图例

r_a the max: 2

r_b the max: 1

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -