



## Model: NU1030ML

Basic size of  
mm

d:	150
D:	225
B:	35

The basic rated load is  
kN

trends C:	194
static state Co:	275
Fatigue load limit Pu:	30

Rated rotation speed is  
r/min

Refer to the speed:	3200
limit speed:	5000
Specification standard holder:	4.85

model


Standard holder:	NU1030M L
Other holder 1):	M

Dimensions are  
mm


d:	150
d <sub>1</sub> ~ :	-
D1 ~ :	198
F,E:	169.5
r <sub>1,2</sub> the min:	2.1
r <sub>3,4</sub> the min:	1.5
s <sup>1)</sup> :	4.9

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	157
d <sub>a</sub> the max:	167
d <sub>b</sub> ,D <sub>a</sub> the min:	173
D <sub>a</sub> the max:	215

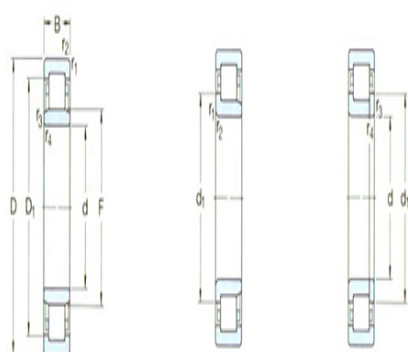

NU NU NUP

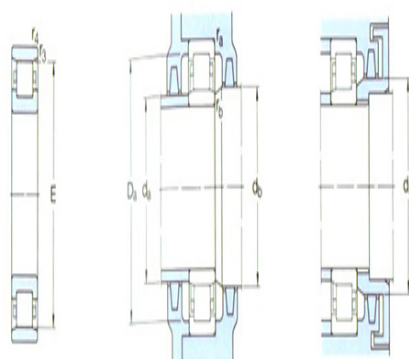

N



轴图

$r_a$ the max:	2
$r_b$ the max:	1.5

Calculation coefficient

kr:	0.1
-----	-----

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-