

## Model: NU2230ECM

Basic size of  
mm

d:	150
D:	270
B:	73

The basic rated load is  
kN

trends C:	735
static state Co:	930
Fatigue load limit Pu:	100

Rated rotation speed is  
r/min

Refer to the speed:	2600
limit speed:	2800
Specification standard holder:	20

model


Standard holder:	*NU2230EC M
Other holder 1):	-

Dimensions are  
mm

d:	150
d <sub>1</sub> ~ :	194
D1 ~ :	234
F,E:	182
r <sub>1,2</sub> the min:	3
r <sub>3,4</sub> the min:	3
s <sup>1)</sup> :	4.9

Shoulder gear and chamfer size  
mm


d <sub>a</sub> the min:	164
d <sub>a</sub> the max:	179
d <sub>b</sub> ,Da the min:	185
Da the max:	256

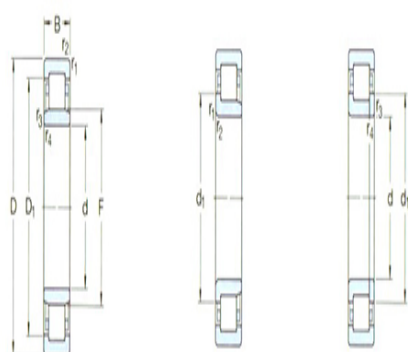

NU

NU

NUP

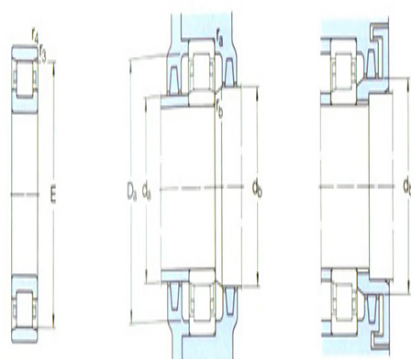

N



轴承

$r_a$  the max: 2.5

$r_b$  the max: 2.5

Calculation coefficient

kr: 0.2

Corner circle

model: HJ2230EC

quality: 1.35

Size B1: 12

Size B2: 24.5