



## Model: NU330ECM

Basic size of  
mm

d:	150
D:	320
B:	65

The basic rated load is  
kN

trends C:	900
static state Co:	965
Fatigue load limit Pu:	100

Rated rotation speed is  
r/min

Refer to the speed:	2200
limit speed:	2600
Specification standard holder:	27.5

model



Standard holder:	*NU330EC M
Other holder 1):	MA

Dimensions are  
mm

d:	150
d <sub>1</sub> ~ :	-
D1 ~ :	270
F,E:	193
r <sub>1,2</sub> the min:	4
r <sub>3,4</sub> the min:	4
s <sup>1)</sup> :	4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	167
d <sub>a</sub> the max:	189
d <sub>b</sub> ,D <sub>a</sub> the min:	196
D <sub>a</sub> the max:	303

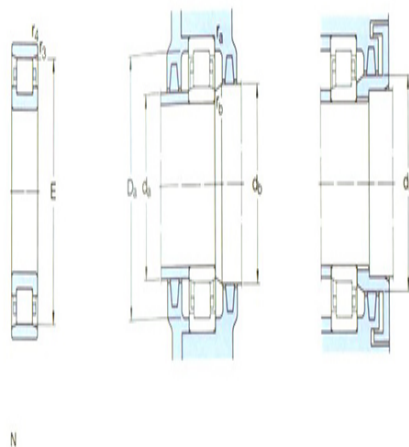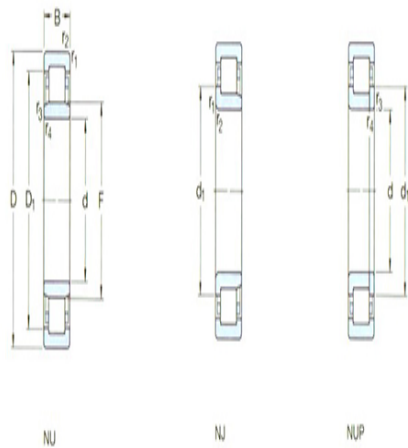



轴图

$r_a$ the max:	3
$r_b$ the max:	3

Calculation coefficient

kr:	0.15
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-