

## Model: NU2330ECMA

Basic size of  
mm

d:	150
D:	320
B:	108

The basic rated load is  
kN

trends C:	1370
static state Co:	1630
Fatigue load limit Pu:	166

Rated rotation speed is  
r/min

Refer to the speed:	2200
limit speed:	3400
Specification standard holder:	45.5

model



Standard holder:	*NU2330ECM A
Other holder 1):	-

Dimensions are  
mm

d:	150
d <sub>1</sub> ~ :	209
D1 ~ :	270
F,E:	193
r <sub>1,2</sub> the min:	4
r <sub>3,4</sub> the min:	4
s <sup>1)</sup> :	10.5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	167
d <sub>a</sub> the max:	189
d <sub>b</sub> ,D <sub>a</sub> the min:	196
D <sub>a</sub> the max:	303

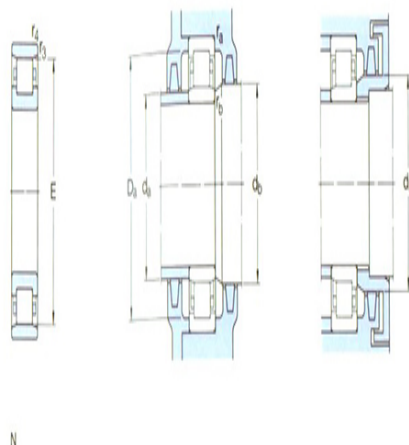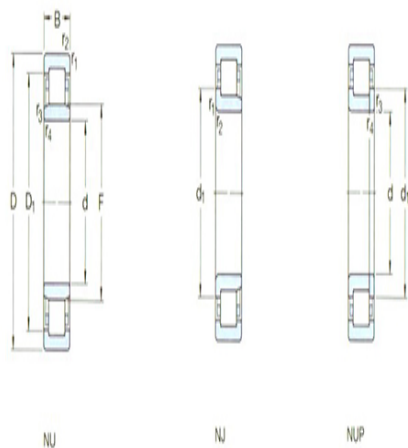



轴图

$r_a$  the max: 3

$r_b$  the max: 3

Calculation coefficient

kr: 0.25

Corner circle

model: -

quality: -

Size B1: -

Size B2: -