

Model: NU1032ML

Basic size of
 mm

d:	160
D:	240
B:	38

The basic rated load is
 kN

trends C:	229
static state Co:	325
Fatigue load limit Pu:	35.5

Rated rotation speed is
 r/min

Refer to the speed:	3000
limit speed:	4800
Specification standard holder:	5.95

model


Standard holder:	NU1032M L
Other holder 1):	M

Dimensions are
 mm


d:	160
d ₁ ~ :	188
D1 ~ :	211
F,E:	180
r _{1,2} the min:	2.1
r _{3,4} the min:	1.5
s ¹⁾ :	5.2

Shoulder gear and chamfer size
 mm

d _a the min:	167
d _a the max:	177
d _b ,Da the min:	183
Da the max:	230

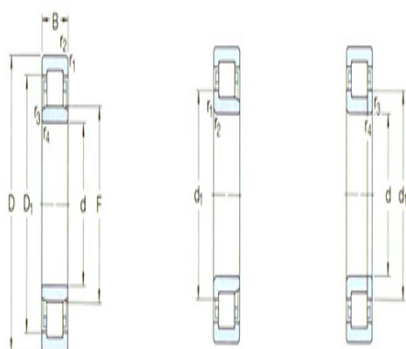

NU NU NUP

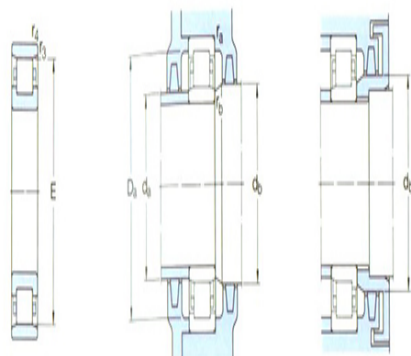

N



视图

r_a the max: 2

r_b the max: 1.5

Calculation coefficient

kr: 0.1

Corner circle

model: HJ1032

quality: 0.65

Size B1: 10

Size B2: 19