



**Model: N232ECM**

Basic size of  
 mm

d:	160
D:	290
B:	48

The basic rated load is  
 kN

trends C:	585
static state Co:	680
Fatigue load limit Pu:	72

Rated rotation speed is  
 r/min

Refer to the speed:	2400
limit speed:	2600
Specification standard holder:	15.5

model



Standard holder:	*N232EC M
Other holder 1):	-

Dimensions are  
 mm

d:	160
d <sub>1</sub> ~ :	206
D1 ~ :	-
F,E:	259
r <sub>1,2</sub> the min:	3
r <sub>3,4</sub> the min:	3
s <sup>1)</sup> :	2.7

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	174
d <sub>a</sub> the max:	255
d <sub>b</sub> ,Da the min:	263
Da the max:	276

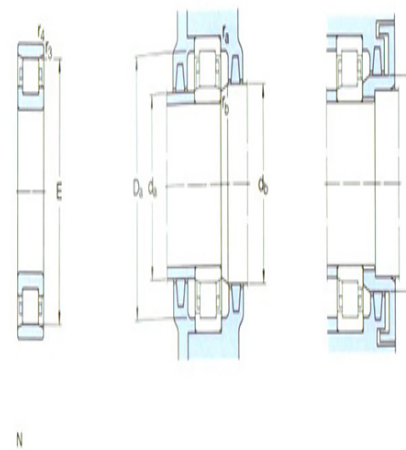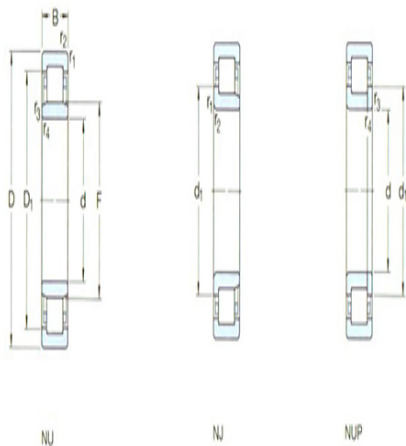



轴图

$r_a$  the max: 2.5

$r_b$  the max: 2.5

Calculation coefficient

kr: 0.15

Corner circle

model: -

quality: -

Size B1: -

Size B2: -