



Model: NJ2232ECMA

Basic size of
mm

| | |
|----|-----|
| d: | 160 |
| D: | 290 |
| B: | 80 |

The basic rated load is
kN

| | |
|---------------------------|------|
| trends C: | 930 |
| static state Co: | 1200 |
| Fatigue load limit Pu: | 129 |

Rated rotation speed is
r/min

| | |
|-----------------------------------|------|
| Refer to the speed: | 2400 |
| limit speed: | 3600 |
| Specification standard holder: | 24.5 |

model



| | |
|------------------|-----------------|
| Standard holder: | *NJ2232ECM A |
| Other holder 1): | - |

Dimensions are
mm

| | |
|---------------------------|-----|
| d: | 160 |
| d ₁ ~ : | 205 |
| D1 ~ : | 252 |
| F,E: | 193 |
| r _{1,2} the min: | 3 |
| r _{3,4} the min: | 3 |
| s ¹⁾ : | 4.5 |

Shoulder gear and chamfer size
mm

| | |
|---|-----|
| d _a the min: | 174 |
| d _a the max: | 188 |
| d _b ,D _a the min: | 209 |
| D _a the max: | 276 |

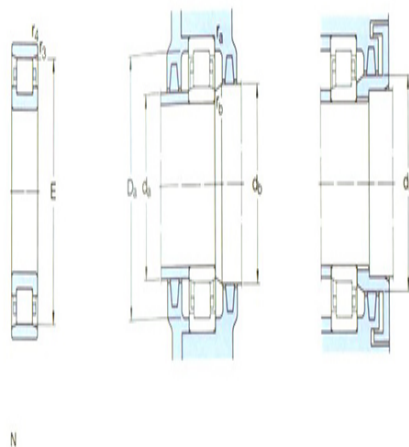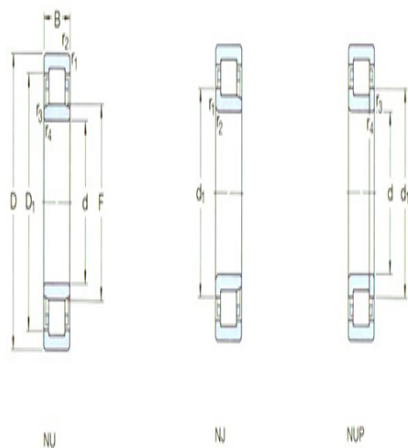



轴承

r_a the max: 2.5

r_b the max: 2.5

Calculation coefficient

kr: 0.2

Corner circle

model: HJ2232EC

quality: 1.55

Size B1: 12

Size B2: 24.5