

**Model: NU2334ECMA**

Basic size of  
 mm

d:	170
D:	360
B:	120

The basic rated load is  
 kN

trends C:	1450
static state Co:	2040
Fatigue load limit Pu:	204

Rated rotation speed is  
 r/min

Refer to the speed:	1700
limit speed:	3000
Specification standard holder:	62

model



Standard holder:	NU2334ECM A
Other holder 1):	-

Dimensions are  
 mm

d:	170
d <sub>1</sub> ~ :	-
D1 ~ :	301
F,E:	216
r <sub>1,2</sub> the min:	4
r <sub>3,4</sub> the min:	4
s <sup>1)</sup> :	10

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	187
d <sub>a</sub> the max:	211
d <sub>b</sub> ,Da the min:	220
Da the max:	343

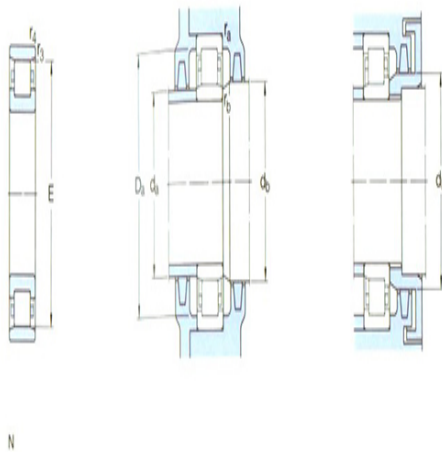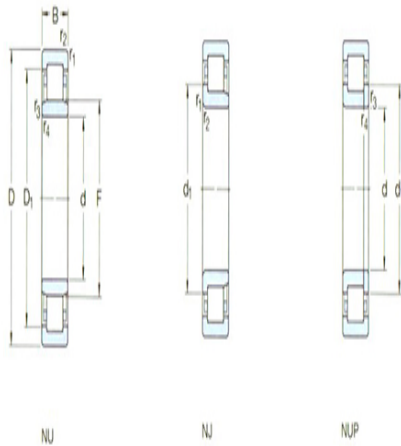



轴类

$r_a$  the max: 3

$r_b$  the max: 3

Calculation coefficient

kr: 0.25

Corner circle

model: -

quality: -

Size B1: -

Size B2: -