



**Model: NU1036ML**

Basic size of  
 mm

d:	180
D:	280
B:	46

The basic rated load is  
 kN

trends C:	336
static state Co:	475
Fatigue load limit Pu:	51

Rated rotation speed is  
 r/min

Refer to the speed:	2600
limit speed:	4000
Specification standard holder:	10.5

model



Standard holder:	NU1036M L
Other holder 1):	M

Dimensions are  
 mm

d:	180
d <sub>1</sub> ~ :	-
D1 ~ :	244
F,E:	205
r <sub>1,2</sub> the min:	2.1
r <sub>3,4</sub> the min:	2.1
s <sup>1)</sup> :	6.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	190
d <sub>a</sub> the max:	202
d <sub>b</sub> ,D <sub>a</sub> the min:	208
D <sub>a</sub> the max:	270

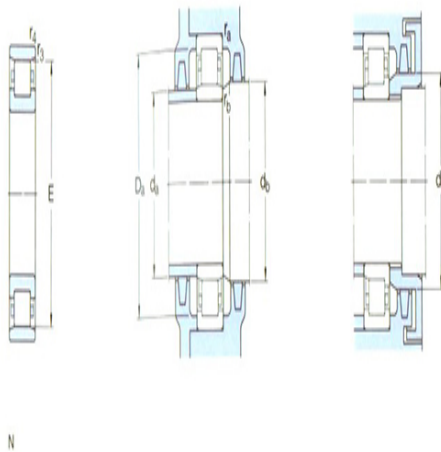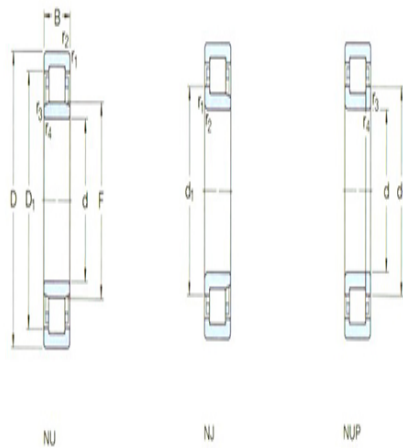



轴副

$r_a$  the max: 2

$r_b$  the max: 2

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -