

## Model: NUP236ECMA

Basic size of  
mm

d:	180
D:	320
B:	52

The basic rated load is  
kN

trends C:	720
static state Co:	850
Fatigue load limit Pu:	88

Rated rotation speed is  
r/min

Refer to the speed:	2200
limit speed:	3200
Specification standard holder:	21

model



Standard holder:	*NUP236ECMA
	A
Other holder 1):	-

Dimensions are  
mm

d:	180
d <sub>1</sub> ~ :	230
D1 ~ :	279
F,E:	217
r <sub>1,2</sub> the min:	4
r <sub>3,4</sub> the min:	4
s <sup>1)</sup> :	-

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	197
d <sub>a</sub> the max:	-
d <sub>b</sub> ,Da the min:	234
Da the max:	303

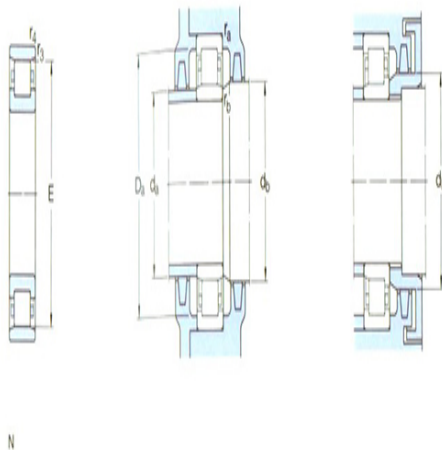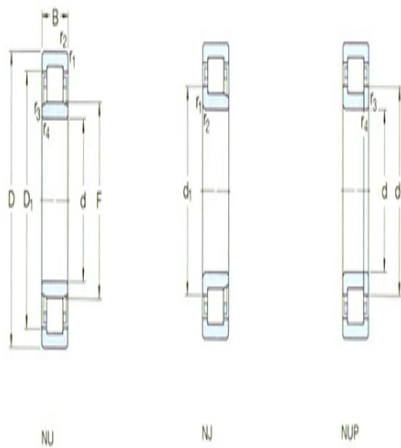



轴副

$r_a$  the max: 3

$r_b$  the max: 3

Calculation coefficient

kr: 0.15

Corner circle

model: -

quality: -

Size B1: -

Size B2: -