

Model: NU1040MA

Basic size of
mm

d:	200
D:	310
B:	51

The basic rated load is
kN

trends C:	380
static state Co:	570
Fatigue load limit Pu:	58.5

Rated rotation speed is
r/min

Refer to the speed:	2400
limit speed:	3000
Specification standard holder:	14.5

model



Standard holder:	NU1040M A
Other holder 1):	M

Dimensions are
mm

d:	200
d ₁ ~ :	239
D1 ~ :	269
F,E:	229
r _{1,2} the min:	2.1
r _{3,4} the min:	2.1
s ¹⁾ :	7

Shoulder gear and chamfer size
mm

d _a the min:	210
d _a the max:	225
d _b ,D _a the min:	233
D _a the max:	299

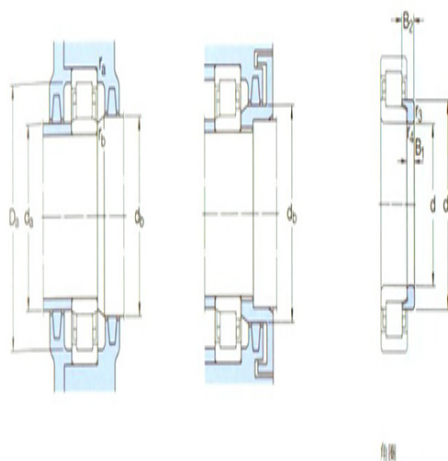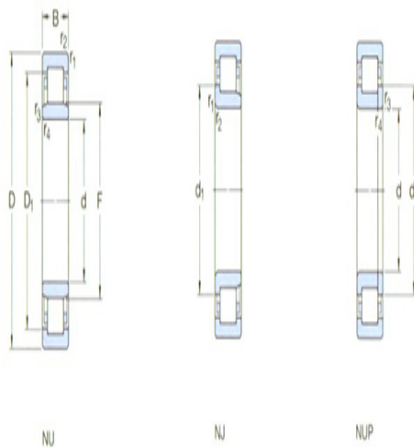

r_a the max:	2
r_b the max:	2

Calculation coefficient

kr:	0.1
-----	-----

Corner circle

model:	HJ1040
quality:	1.65
Size B1:	13
Size B2:	25.5