



## Model: NU240ECMA

Basic size of  
mm

d:	200
D:	360
B:	58

The basic rated load is  
kN

trends C:	850
static state Co:	1020
Fatigue load limit Pu:	100

Rated rotation speed is  
r/min

Refer to the speed:	1900
limit speed:	2800
Specification standard holder:	28.5

model



Standard holder:	*NU240ECM A
Other holder 1):	M

Dimensions are  
mm

d:	200
d <sub>1</sub> ~ :	258
D1 ~ :	312
F,E:	243
r <sub>1,2</sub> the min:	4
r <sub>3,4</sub> the min:	4
s <sup>1)</sup> :	2.6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	217
d <sub>a</sub> the max:	239
d <sub>b</sub> ,D <sub>a</sub> the min:	247
D <sub>a</sub> the max:	343

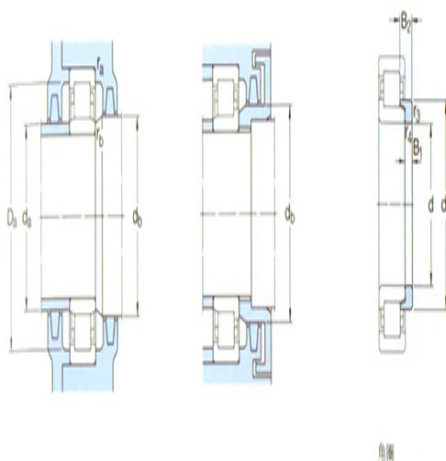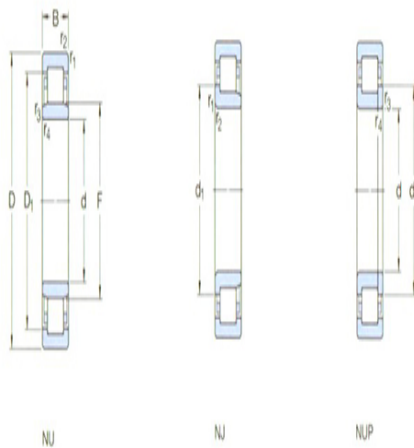

$r_a$ the max:	3
----------------	---

$r_b$ the max:	3
----------------	---

Calculation coefficient

kr:	0.15
-----	------

Corner circle

model:	HJ240EC
--------	---------

quality:	2.55
----------	------

Size B1:	14
----------	----

Size B2:	23
----------	----