



## Model: NU340ECMA

Basic size of  
mm

d:	200
D:	420
B:	80

The basic rated load is  
kN

trends C:	1230
static state Co:	1630
Fatigue load limit Pu:	150

Rated rotation speed is  
r/min

Refer to the speed:	1400
limit speed:	2400
Specification standard holder:	56

model



Standard holder:	NU340ECM A
Other holder 1):	-

Dimensions are  
mm

d:	200
d <sub>1</sub> ~ :	-
D1 ~ :	337
F,E:	260
r <sub>1,2</sub> the min:	5
r <sub>3,4</sub> the min:	5
s <sup>1)</sup> :	4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	220
d <sub>a</sub> the max:	253
d <sub>b</sub> ,D <sub>a</sub> the min:	264
D <sub>a</sub> the max:	400

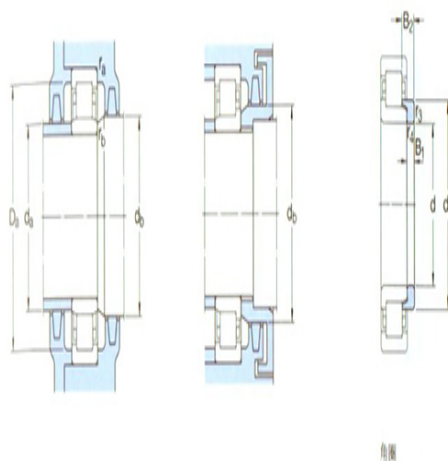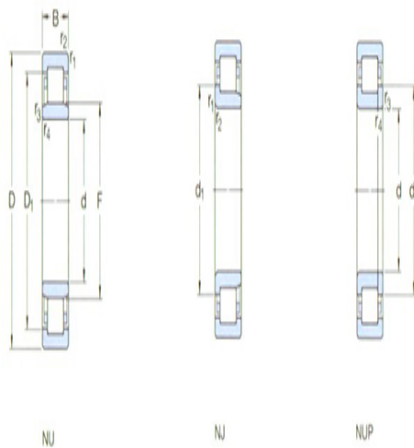

$r_a$  the max: 4

$r_b$  the max: 4

#### Calculation coefficient

kr: 0.15

#### Corner circle

model: -

quality: -

Size B1: -

Size B2: -