

Model: NU1044MA

Basic size of
mm

d:	220
D:	340
B:	56

The basic rated load is
kN

trends C:	495
static state Co:	735
Fatigue load limit Pu:	73.5

Rated rotation speed is
r/min

Refer to the speed:	2200
limit speed:	2800
Specification standard holder:	19

model



Standard holder:	NU1044M A
Other holder 1):	M

Dimensions are
mm

d:	220
d ₁ ~ :	262
D1 ~ :	297
F,E:	250
r _{1,2} the min:	3
r _{3,4} the min:	3
s ¹⁾ :	7.5

Shoulder gear and chamfer size
mm

d _a the min:	233
d _a the max:	246
d _b ,D _a the min:	254
D _a the max:	327

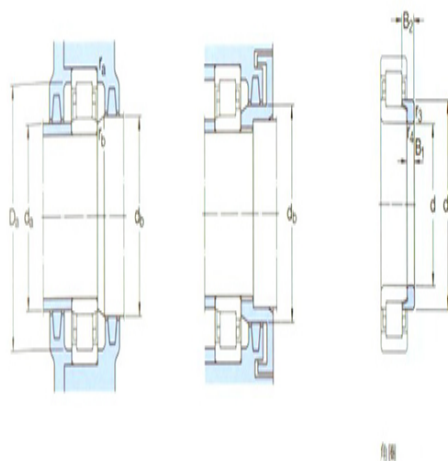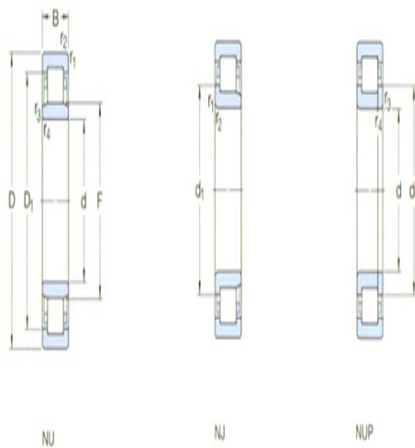

r_a the max:	2.5
----------------	-----

r_b the max:	2.5
----------------	-----

Calculation coefficient

kr:	0.1
-----	-----

Corner circle

model:	HJ1044
--------	--------

quality:	2.1
----------	-----

Size B1:	14
----------	----

Size B2:	27
----------	----