

Model: NUP244ECMA

Basic size of
mm

d:	220
D:	400
B:	65

The basic rated load is
kN

trends C:	1060
static state Co:	1290
Fatigue load limit Pu:	125

Rated rotation speed is
r/min

Refer to the speed:	1600
limit speed:	2400
Specification standard holder:	39.5

model



Standard holder:	*NUP244ECMA
Other holder 1):	M

Dimensions are
mm

d:	220
$d_1 \sim$:	284
$D_1 \sim$:	344
F,E:	268
$r_{1,2}$ the min:	4
$r_{3,4}$ the min:	4
$s^{1)}$:	-

Shoulder gear and chamfer size
mm

d_a the min:	237
d_a the max:	-
d_b, D_a the min:	288
D_a the max:	383

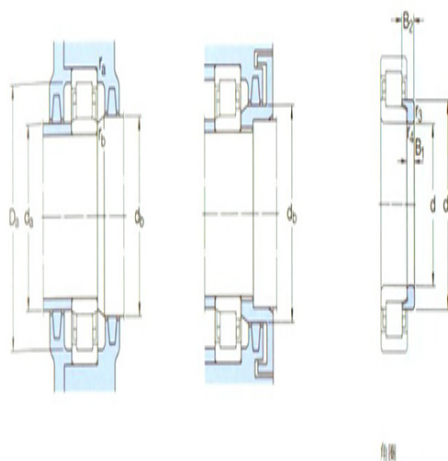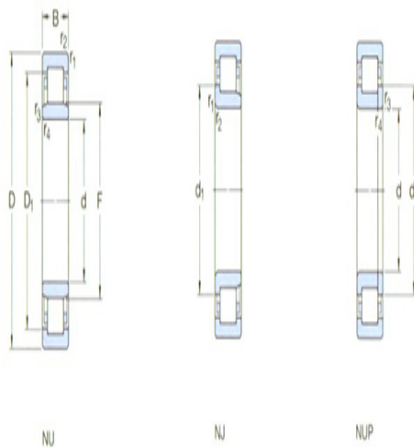

r_a the max: 3

r_b the max: 3

Calculation coefficient

kr: 0.15

Corner circle

model: -

quality: -

Size B1: -

Size B2: -