



## Model: NU2344ECMA

Basic size of  
mm

d:	220
D:	460
B:	145

The basic rated load is  
kN

trends C:	2380
static state Co:	3450
Fatigue load limit Pu:	310

Rated rotation speed is  
r/min

Refer to the speed:	1300
limit speed:	2200
Specification standard holder:	120

model



Standard holder:	NU2344ECMA
Other holder 1):	-

Dimensions are  
mm

d:	220
d <sub>1</sub> ~ :	-
D1 ~ :	384
F,E:	277
r <sub>1,2</sub> the min:	5
r <sub>3,4</sub> the min:	5
s <sup>1)</sup> :	10.4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	240
d <sub>a</sub> the max:	268
d <sub>b</sub> ,D <sub>a</sub> the min:	280
D <sub>a</sub> the max:	440

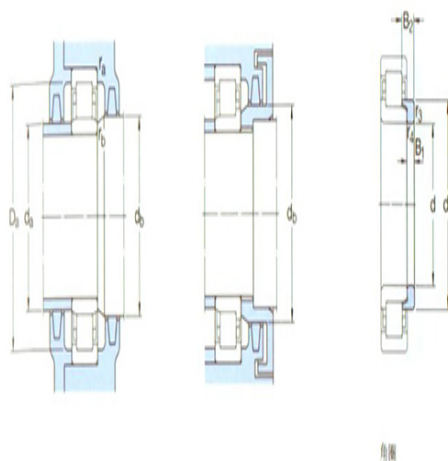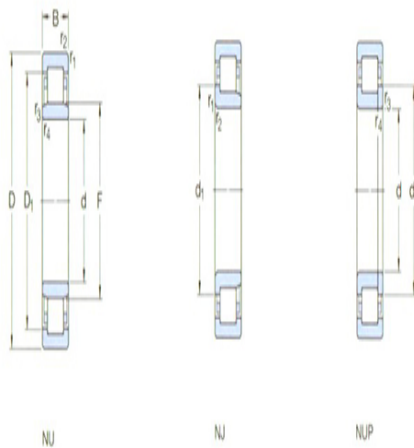

$r_a$  the max: 4

$r_b$  the max: 4

#### Calculation coefficient

kr: 0.25

#### Corner circle

model: -

quality: -

Size B1: -

Size B2: -