



## Model: NU2248MA

Basic size of  
mm

d:	240
D:	440
B:	120

The basic rated load is  
kN

trends C:	1450
static state Co:	2360
Fatigue load limit Pu:	216

Rated rotation speed is  
r/min

Refer to the speed:	1500
limit speed:	2200
Specification standard holder:	84

model



Standard holder:	NU2248M A
Other holder 1):	-

Dimensions are  
mm

d:	240
d <sub>1</sub> ~ :	-
D1 ~ :	365
F,E:	295
r <sub>1,2</sub> the min:	4
r <sub>3,4</sub> the min:	4
s <sup>1)</sup> :	4.3

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	257
d <sub>a</sub> the max:	284
d <sub>b</sub> ,D <sub>a</sub> the min:	299
D <sub>a</sub> the max:	423

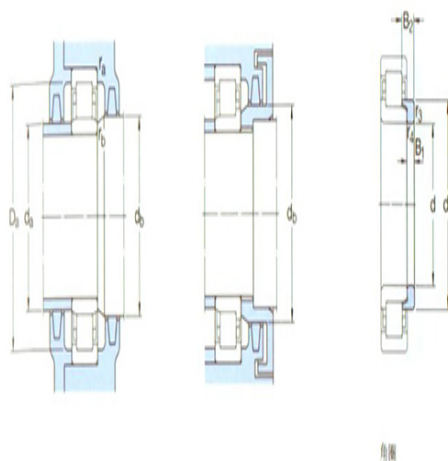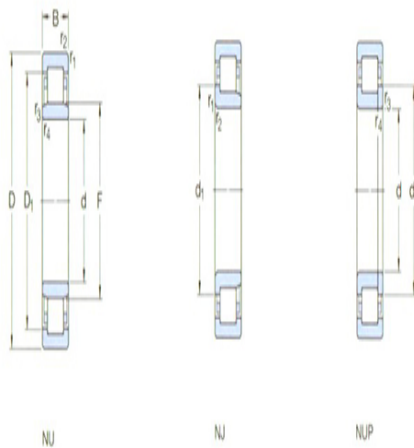

$r_a$ the max:	3
----------------	---

$r_b$ the max:	3
----------------	---

Calculation coefficient

kr:	0.2
-----	-----

Corner circle

model:	-
--------	---

quality:	-
----------	---

Size B1:	-
----------	---

Size B2:	-
----------	---