



Model: NJ2248MA

Basic size of
mm

| | |
|----|-----|
| d: | 240 |
| D: | 440 |
| B: | 120 |

The basic rated load is
kN

| | |
|------------------------|------|
| trends C: | 1450 |
| static state Co: | 2360 |
| Fatigue load limit Pu: | 216 |

Rated rotation speed is
r/min

| | |
|--------------------------------|------|
| Refer to the speed: | 1500 |
| limit speed: | 2200 |
| Specification standard holder: | 85 |

model



| | |
|------------------|--------------|
| Standard holder: | NJ2248M A |
| Other holder 1): | - |

Dimensions are
mm

| | |
|---------------------------|-----|
| d: | 240 |
| d ₁ ~ : | 313 |
| D1 ~ : | 365 |
| F,E: | 295 |
| r _{1,2} the min: | 4 |
| r _{3,4} the min: | 4 |
| s ¹⁾ : | 4.3 |

Shoulder gear and chamfer size
mm

| | |
|---|-----|
| d _a the min: | 257 |
| d _a the max: | 284 |
| d _b ,D _a the min: | 317 |
| D _a the max: | 423 |

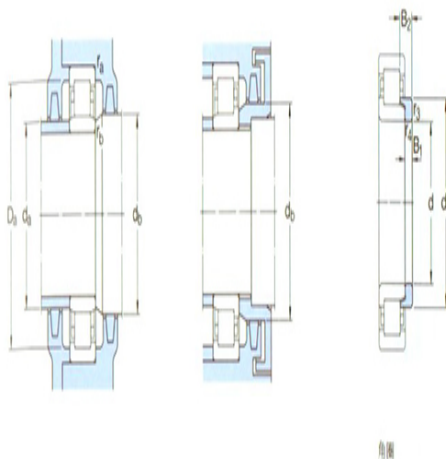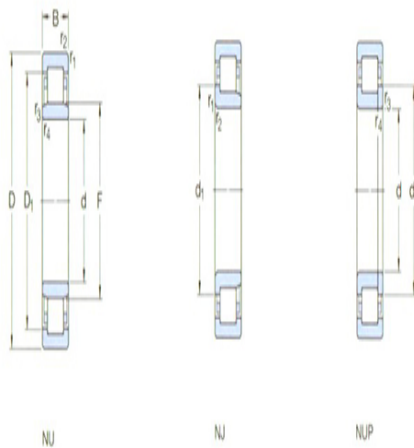

| | |
|----------------|---|
| r_a the max: | 3 |
|----------------|---|

| | |
|----------------|---|
| r_b the max: | 3 |
|----------------|---|

Calculation coefficient

| | |
|-----|-----|
| kr: | 0.2 |
|-----|-----|

Corner circle

| | |
|--------|---|
| model: | - |
|--------|---|

| | |
|----------|---|
| quality: | - |
|----------|---|

| | |
|----------|---|
| Size B1: | - |
|----------|---|

| | |
|----------|---|
| Size B2: | - |
|----------|---|