



**Model: NU2348ECMA**

Basic size of  
 mm

d:	240
D:	500
B:	155

The basic rated load is  
 kN

trends C:	2600
static state Co:	3650
Fatigue load limit Pu:	320

Rated rotation speed is  
 r/min

Refer to the speed:	1200
limit speed:	2000
Specification standard holder:	155

model



Standard holder:	NU2348ECMA
Other holder 1):	-

Dimensions are  
 mm

d:	240
d <sub>1</sub> ~ :	-
D1 ~ :	426
F,E:	299
r <sub>1,2</sub> the min:	5
r <sub>3,4</sub> the min:	5
s <sup>1)</sup> :	10.3

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	260
d <sub>a</sub> the max:	295
d <sub>b</sub> ,D <sub>a</sub> the min:	305
D <sub>a</sub> the max:	480

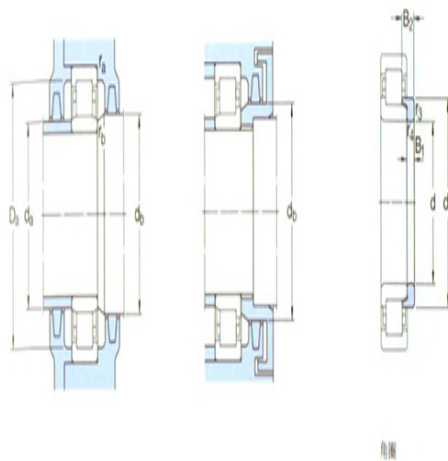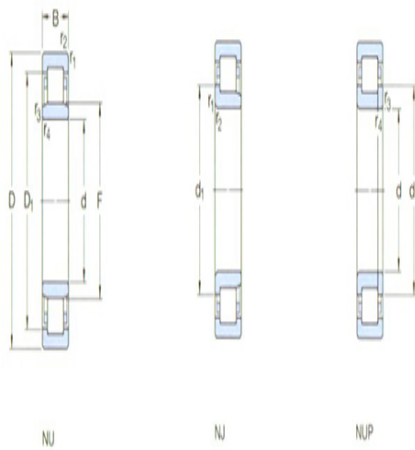

$r_a$ the max:	4
----------------	---

$r_b$ the max:	4
----------------	---

Calculation coefficient

kr:	0.25
-----	------

Corner circle

model:	-
--------	---

quality:	-
----------	---

Size B1:	-
----------	---

Size B2:	-
----------	---