



Model: NU252MA

Basic size of
mm

d:	260
D:	480
B:	80

The basic rated load is
kN

trends C:	1170
static state Co:	1700
Fatigue load limit Pu:	156

Rated rotation speed is
r/min

Refer to the speed:	1400
limit speed:	2000
quality:	68.5
model:	NU252MA

Dimensions are
mm


d:	260
$d_1 \sim$:	340
$D_1 \sim$:	397
F,E:	320
$r_{1,2}$ the min:	5
$r_{3,4}$ the min:	5
s^1):	3.4

Shoulder gear and chamfer size
mm

d_a the min:	280
d_a the max:	313
d_b, D_a the min:	324
D_a the max:	460
r_a the max:	4
r_b the max:	4

Calculation coefficient


kr:	0.15
-----	------

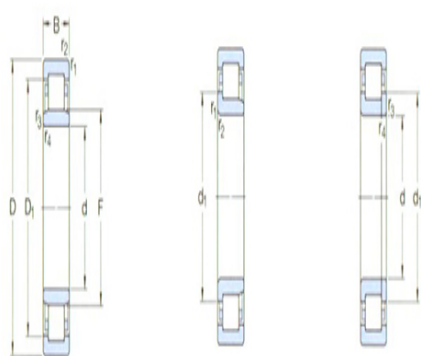

NU

NU

NUP

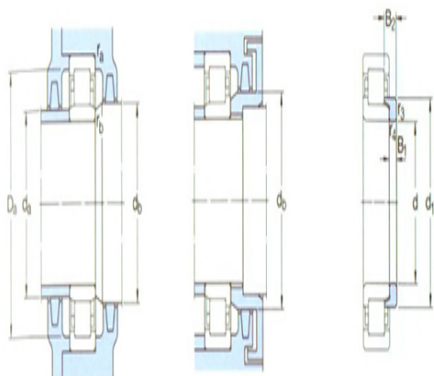

作圖

Corner circle

model:	HJ252
quality:	6.2
Size B1:	18
Size B2:	33