



Model: NUP252MA

Basic size of
 mm

d:	260
D:	480
B:	80

The basic rated load is
 kN

trends C:	1170
static state Co:	1700
Fatigue load limit Pu:	156

Rated rotation speed is
 r/min

Refer to the speed:	1400
limit speed:	2000
quality:	72
model:	NUP252M A


Dimensions are
 mm

d:	260
d ₁ ~ :	340
D1 ~ :	397
F,E:	320
r _{1,2} the min:	5
r _{3,4} the min:	5
5 ¹⁾ :	-

Shoulder gear and chamfer size
 mm

d _a the min:	280
d _a the max:	-
d _b ,Da the min:	344
Da the max:	460
r _a the max:	4
r _b the max:	4


Calculation coefficient

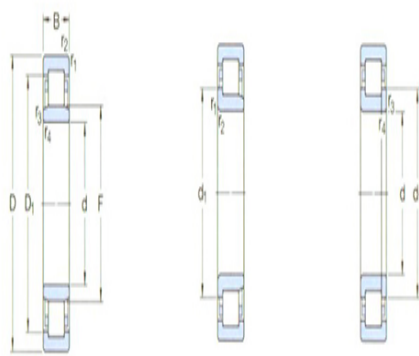

NU

NU

NUP

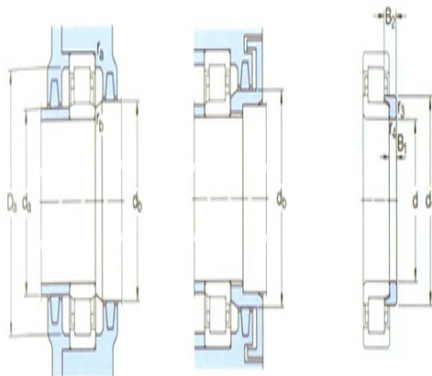

作圖

kr:	0.15
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-