



Model: NU2252MA

Basic size of
mm

d:	260
D:	480
B:	130

The basic rated load is
kN

trends C:	1790
static state Co:	3000
Fatigue load limit Pu:	265

Rated rotation speed is
r/min

Refer to the speed:	1300
limit speed:	2000
quality:	110
model:	NU2252M A


Dimensions are
mm

d:	260
$d_1 \sim$:	-
$D_1 \sim$:	397
F,E:	320
$r_{1,2}$ the min:	5
$r_{3,4}$ the min:	5
s_1):	4.3

Shoulder gear and chamfer size
mm

d_a the min:	280
d_a the max:	309
d_b, D_a the min:	324
D_a the max:	460
r_a the max:	4
r_b the max:	4


Calculation coefficient

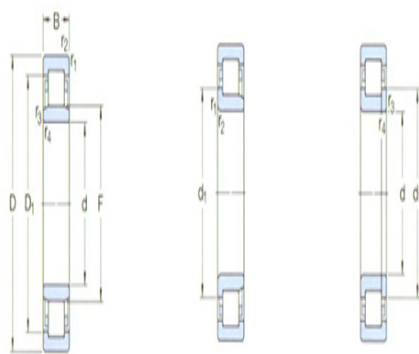

NU

NU

NUP

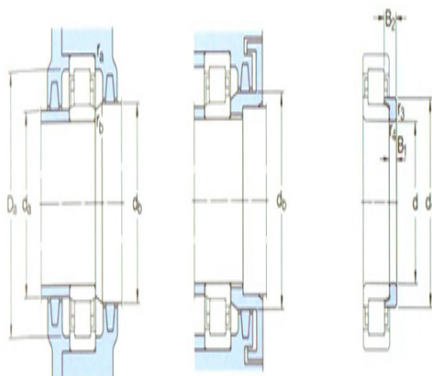

作圖

kr:	0.2
-----	-----

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-