



**Model: NU352ECMA**

Basic size of  
 mm

d:	260
D:	540
B:	102

The basic rated load is  
 kN

trends C:	1940
static state Co:	2700
Fatigue load limit Pu:	236

Rated rotation speed is  
 r/min

Refer to the speed:	1100
limit speed:	1800
quality:	125
model:	NU352ECMA
	A


Dimensions are  
 mm

d:	260
d <sub>1</sub> ~ :	-
D1 ~ :	455
F,E:	337
r <sub>1,2</sub> the min:	6
r <sub>3,4</sub> the min:	6
ξ <sup>1)</sup> :	4.2

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	286
d <sub>a</sub> the max:	330
d <sub>b</sub> ,Da the min:	341
Da the max:	514
r <sub>a</sub> the max:	5
r <sub>b</sub> the max:	5


Calculation coefficient

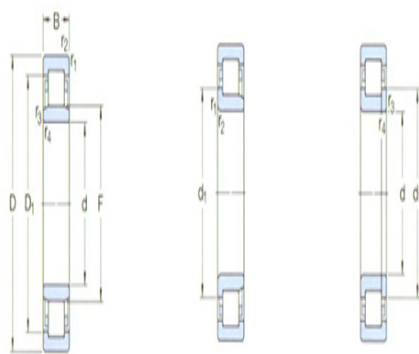

NU

NU

NUP

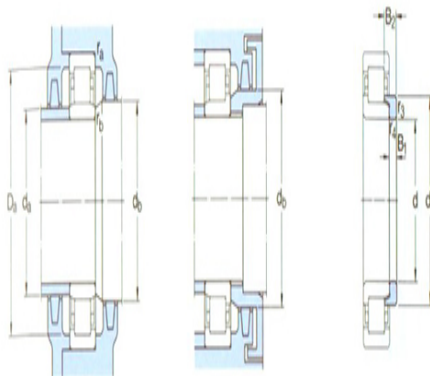

作圖

kr:	0.15
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-