



Model: NU1056MA

Basic size of
 mm

d:	280
D:	420
B:	65

The basic rated load is
 kN

trends C:	660
static state Co:	1060
Fatigue load limit Pu:	102

Rated rotation speed is
 r/min

Refer to the speed:	1700
limit speed:	2200
quality:	32.5
model:	NU1056M A


Dimensions are
 mm

d:	280
d ₁ ~ :	329
D1 ~ :	369
F,E:	316
r _{1,2} the min:	4
r _{3,4} the min:	4
5 ¹⁾ :	8

Shoulder gear and chamfer size
 mm

d _a the min:	295
d _a the max:	311
d _b ,Da the min:	320
Da the max:	405
r _a the max:	3
r _b the max:	3


Calculation coefficient

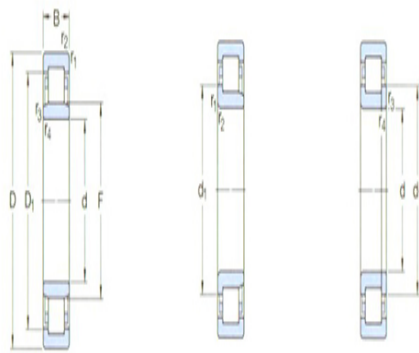

NU

NU

NUP

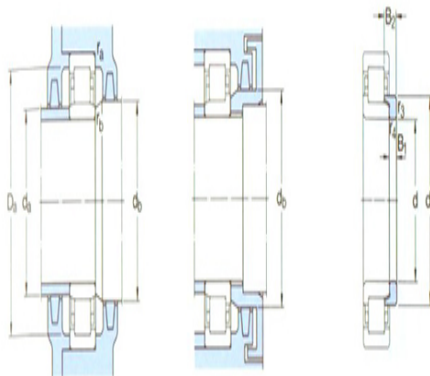

作圖

kr:	0.1
-----	-----

Corner circle

model:	HJ1056
quality:	3.55
Size B1:	16
Size B2:	31.5